


### PRODUCT INTRODUCTION

EIDOLON 800 is a high-power outdoor LED Gobo projector with IP66 waterproof rating in the die-cast magnesium alloy. It is forced air cooling with a low noise fan. Built-in electronic zoom 5-52° and automatic focusing system, which apply to large area long-range projection; Equipped with CMY color mixing system, 6 colors, 14 rotating gobos, animation wheel, and prisms, which can achieve colorful animation effects; Equipped OLED display with touch button. Apply to theme parks, amusement places, landmark building, commercial buildings, outdoor performances, etc.



E8

### DIMENSIONAL DRAWING

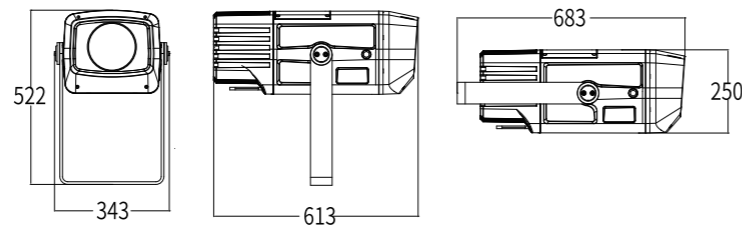

## Eidolon 800

PHAG1681SCT

## Eidolon 800 Pro

PHAG1681SCT P

### TECHNICAL PARAMETER

|                    |  |  |
|--------------------|--|--|
| Max. Power         | 750W   | 750W   |
| Light source       | 600W(cool white LED module)  | 600W(cool white LED module)  |
| Zoom               | 5°-52°(motorised linear zoom)  | 5°-52°(motorised linear zoom)  |
| Display            | On board Control, 0-25Hz Strobe  | On board Control, 0-25Hz Strobe  |
| Con personality    | STANDARD(24CHS), BASIC(20CHS)  | STANDARD(24CHS), BASIC(20CHS)  |
| Rotating Gobos     | 2 rotating gobo wheels (7+open interchange glass gobos), Gobo-flow effect, Gobo shake, Bi-directional rotation | 2 rotating gobo wheels (7+open interchange glass gobos), Gobo-flow effect, Gobo shake, Bi-directional rotation |
| Color wheel        | One color wheel (6 dichroic-filters+open, Rainbow flow effect)   | One color wheel (6 dichroic-filters+open, Rainbow flow effect)   |
| CCT                | Linear CTO 2700K-6500K   | Linear CTO 2700K-6500K   |
| Prism              | One 4 prism with bi-directional rotation, Speed adjustable   | One 4 prism with bi-directional rotation, Speed adjustable   |
| Color mixing       | CMY, independently variable 0 - 100%   | CMY, independently variable 0 - 100%   |
| Focus              | Motorized linear focus   | Motorized linear focus   |
| Animation Wheel    | Bi-directional rotation, Speed adjustable  | Bi-directional rotation, Speed adjustable  |
| Frost              | 1 motorized frost filter   | 1 motorized frost filter   |
| Dimensions (L*W*H) | 683x343x522mm  | 683x343x522mm  |
| Shutter system     | No   | 4 manual shutter blades  |

### COLORS



### CMY+CTO



### RATATING GOBO WHEEL 1



### RATATING GOBO WHEEL 2



### ANIMATION WHEEL




### MANUAL FRAMING SYSTEM (EIDOLON 800 PRO)



### SPECIFICATIONS



### ILLUMINANCE AT DISTANCE

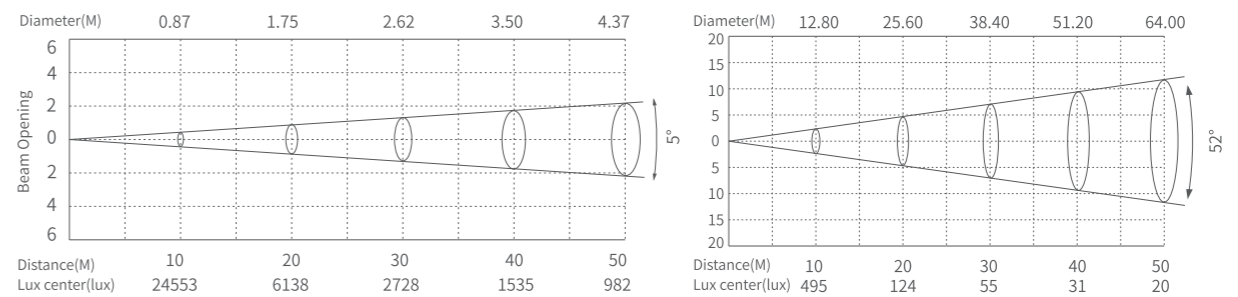

### OPTIONAL ACCESSORIES



Wireless Kit  
(2440010832)