

KS3

KOLORMAX KS3, use of lightweight aviation aluminum, energy saving design, the weight of the whole fixture only 4.2kg, green lighting energy consumption ratio of 1175lm/kg, high-efficiency power 4-in-1 RGBL LED chip, with a new heat dissipation distribution structure, to ensure that LED in high-intensity operation stable and reliable, durable. Unique high-end optical design, easily get an accurate mixed single color or multi-color, and the light efficiency up to 58lm/w, leading the new concept of lighting energy saving. Suitable for garden landscape, city square, park and other outdoor environment. Let every KOLORMAX fixtures become a work of art, light up the city night.



TECHNICAL PARAMETER

Max. Power: 100W

Light source: 4 in 1 RGBL

Luminous Flux: 6029lm

Peak Intensity: 22355cd(15°)

CRI: Ra: 85

CTO: 1800K-10000K

Con Personality: DMX512, RDM

Operating voltage: AC220V-50/60Hz


Working Temperature: -20°C~45°C

Protection Level: IP67

Dimensions (L*W*H): 202*198*207mm

weight: 4.2kg


ANGLE

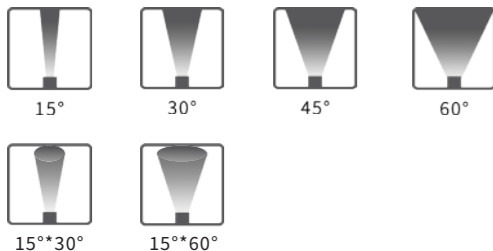


SPECIFICATIONS




DIMENSIONAL DRAWING

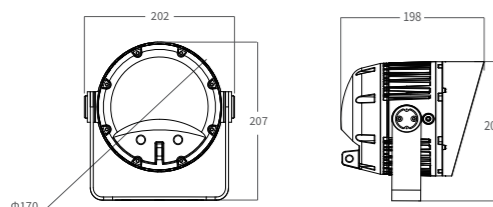


OPTIONAL

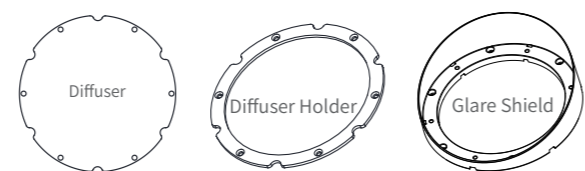


LIGHT DISTRIBUTION DIAGRAM

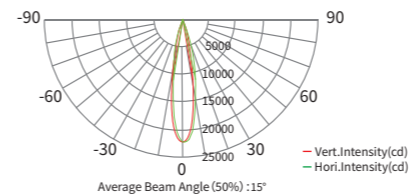


Lumen	6029lm
Illuminance	894lx(5m)
Peak Intensity	22355cd(15°)

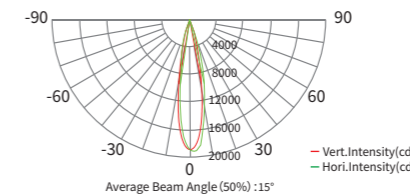


Lumen	4920lm
Illuminance	765lx(5m)
Peak Intensity	19160cd(15°)

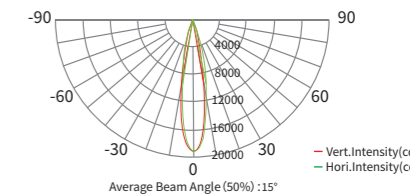


Lumen	4879lm
Illuminance	771lx(5m)
Peak Intensity	19288cd(15°)

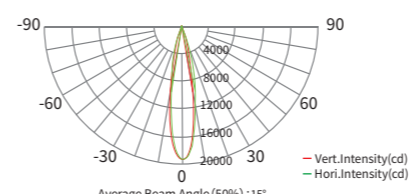

Lumen	4904lm
Illuminance	788lx(5m)
Peak Intensity	19715cd(15°)

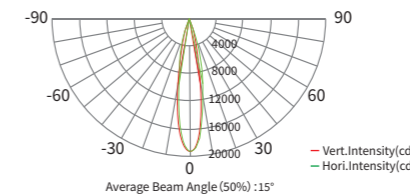

Lumen	4828lm
Illuminance	789lx(5m)
Peak Intensity	19719cd(15°)

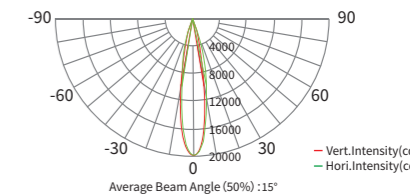

Lumen	4890lm
Illuminance	798lx(5m)
Peak Intensity	19953cd(15°)

ILLUMINANCE AT DISTANCE

