

KS4

KOLORMAX KS4, use of lightweight aviation aluminum, energy saving design, the weight of the whole fixture only 8.6kg, green lighting energy consumption ratio of 1327lm/kg, high-efficiency power 4-in-1 RGBL LED chip, with a new heat dissipation distribution structure, to ensure that LED in high-intensity operation stable and reliable, durable. Unique high-end optical design, easily get an accurate mixed single color or multi-color, and the light efficiency up to 66lm/w, leading the new concept of lighting energy saving. Suitable for venues, bridges, tunnels, park landscape and other outdoor environment. KOLORMAX KS4, lighting up every space with charming light.



TECHNICAL PARAMETER

Max. Power: 200W

Light source: 4 in 1 RGBL

Luminous Flux: 13350lm

Peak Intensity: 45412cd(15°)

CRI: Ra: 85

CTO: 1800K-10000K

Con Personality: DMX512, RDM

Operating voltage: AC220V-50/60Hz


Working Temperature: -20°C~45°C

Protection Level: IP67

Dimensions (L*W*H): 287*250*284mm

weight: 8.2kg


ANGLE

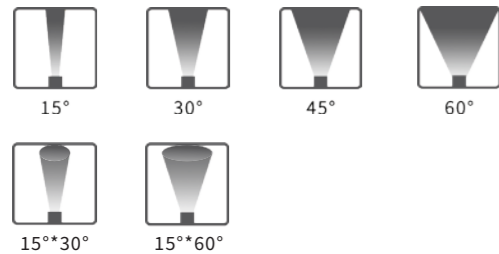


SPECIFICATIONS




DIMENSIONAL DRAWING

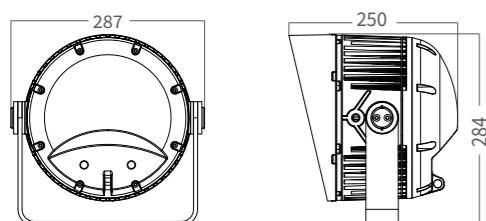

OPTIONAL

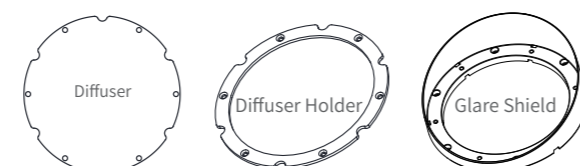


LIGHT DISTRIBUTION DIAGRAM

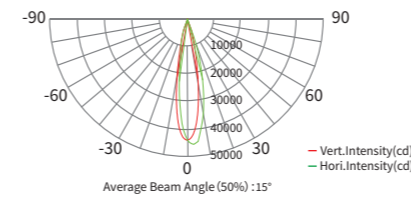


RGBL

Lumen	13350lm
Illuminance	1809lx(5m)
Peak Intensity	45412cd(15°)

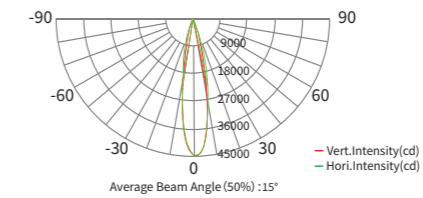


1800K

Lumen	12173lm
Illuminance	1803lx(5m)
Peak Intensity	45152cd(15°)

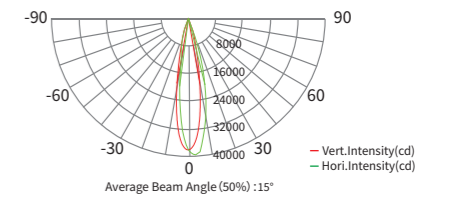


3200K

Lumen	10705lm
Illuminance	1580lx(5m)
Peak Intensity	39659cd(15°)

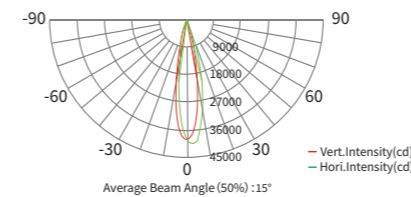


4000K

Lumen	10730lm
Illuminance	1609lx(5m)
Peak Intensity	40392cd(15°)

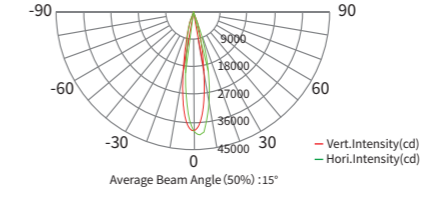

5600K

Lumen	10599lm
Illuminance	1610lx(5m)
Peak Intensity	40410cd(15°)

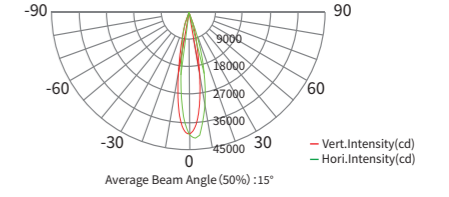

6500K

Lumen	10709lm
Illuminance	1625lx(5m)
Peak Intensity	40783cd(15°)

ILLUMINANCE AT DISTANCE

