
2026 CATALOGUE

Lighting
Your Dreams



PRAHA[®]
LIGHTING

PRAHA LIGHTING

Office Add: Av. Central #11, Fracc. Ind. Alce Blanco, C.P. 53370 Naucalpan de Juárez, Méx.

T: 55 5000 9400 ext 408 / +52 55 6816 2084

C: ventas@prahalighting.com

www.prahalighting.com

www.prahalighting.com

COMPANY PROFILE

PRAHA LIGHTING is skilled specialist manufacturer and knowledgeable exporter for LED lighting. Founded in 2010 in Ningbo seaport city, we are always committed to offer an extensive range of efficient and cost-effective lighting solutions for all purposes.

WHAT WE PROVIDE?

We are proud to offer you LED lighting products that comply with all safety standards and international EMC requirements at the right price and exceptional experience. We also have the ability to make customer-oriented products that only a manufacturer has the flexibility to offer.

WHY WE DO?

Central to our soul is our desire to cherish the belief of making the world better and brighter for ourselves and our children, through our products with new technology and competitive offer.

HOW CAN WE MAKE IT?

Our team works closely with our international customers based on exhaustive surveys of customer requirements and local marketing trend to provide high quality products.

Under the guidelines of ISO9001/2015 and ISO14001/2015 quality guarantee system, we insist that continual product quality control is at the every core of Prahalighting's operation strategy.

CATALOGUE

DOWNLIGHT	01-72
DIMMER	73-74
CABINET LIGHT	75-86
BULKHEAD	87-108
WALL LIGHT	109-116
CEILING LIGHT	117-134
LINEAR LIGHT	135-142
BATTEN	143-156
TRI-PROOF	157-172



DOWNLIGHT

RECESSED OR SURFACE MOUNT WITH CCT AND DIMMING OPTIONS
PERFECT FOR RESIDENTIAL OR COMMERCIAL APPLICATIONS

DUAL POWER
SELECTABLE
BY DIP SWITCH


4CCT SELECTABLE
BY DIP SWITCH


► SCL520

MAGNETIC BEZEL
FOR EASY INSTALLATION



INTERCHANGEABLE BEZEL

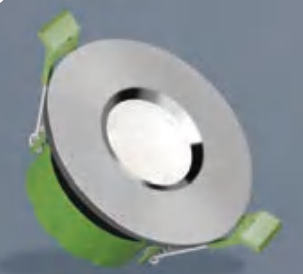

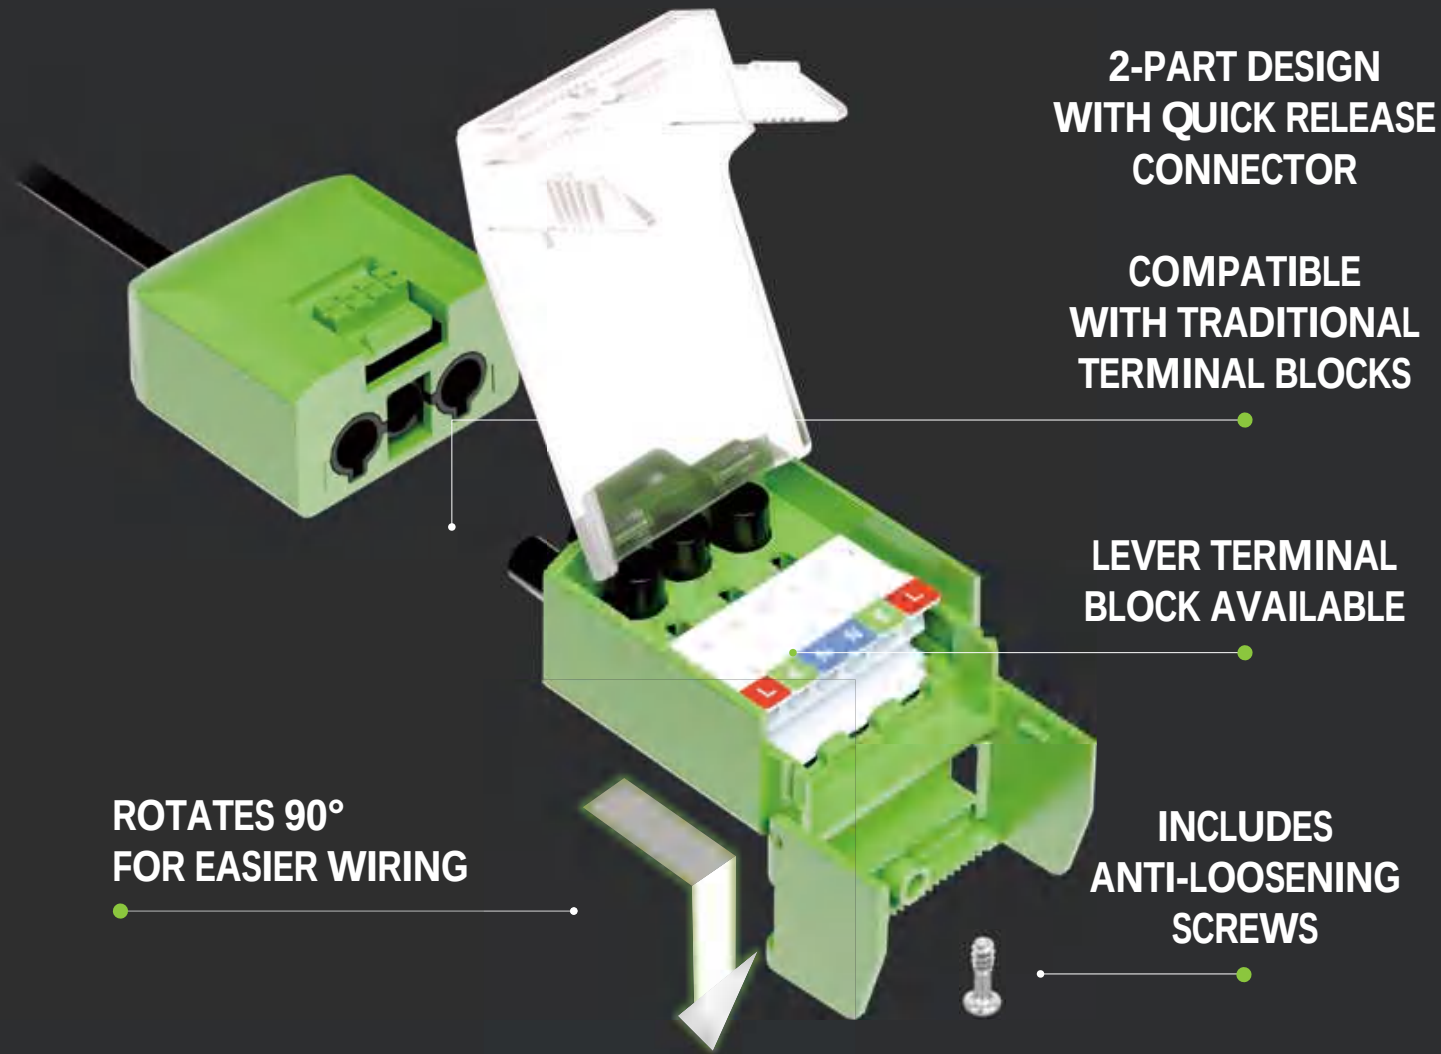

2 parts design





Magnetic bezel and Interchangeable



Blown insulation coverable

SCL520 | LED FIRE RATED DOWNLIGHT -FIXED RANGE

- Slim design for building roof within 40mm height
- Fixed IP65 version
- 30-60-90 mins fire rated
- Triac dimmable
- Blown insulation coverable
- 4CCT & 2Power selectable by DIP switch under bezel
- 2 parts quick release junction box
- Interchangeable magnetic bezels for option
- High lumen efficacy up to 135 lm/W

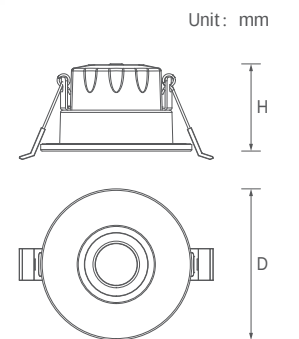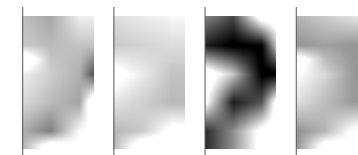


ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(ΦD×H)	CUT OUT
SCL520	8/5W	220-240V	1000LM	65	Φ83x47MM	Φ70-75mm

DUAL POWER
SELECTABLE
BY DIP SWITCH

4CCT SELECTABLE
BY DIP SWITCH

► SCL520P

INTERCHANGEABLE BEZEL

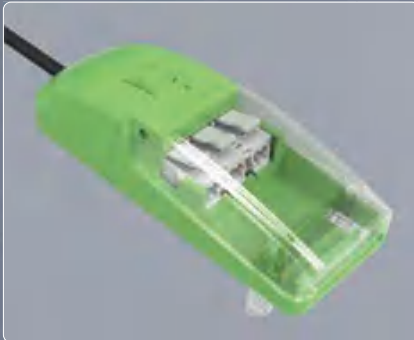

2 parts design





Interchangeable bezels for option



Blown insulation coverable

SCL520P | LED FIRE RATED DOWNLIGHT
-FIXED RANGE

- Slim design for building roof within 40mm height
- Fixed IP65 version
- 30-60-90 mins fire rated
- Triac dimmable
- Blown insulation coverable
- 4CCT & 2Power selectable by DIP switch under bezel
- 2 parts quick release junction box
- Interchangeable bezels for option

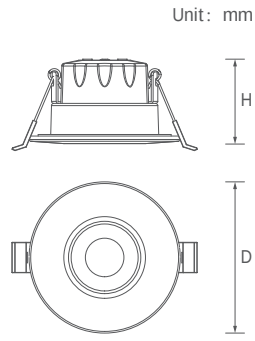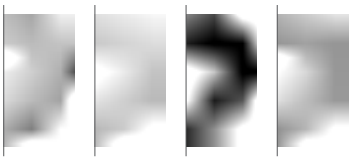

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(ΦD×H)	CUT OUT
SCL520P	8/5W	220-240V	1000LM	65	Φ86×47MM	Φ68-75mm

ROTATABLE FIRE RATED DOWNLIGHT



180° ADJUSTABLE BASED ON ONE PIVOT POINT
MAKE YOUR HOME MORE FLEXIBLE



Isolated driver solution




Rotatable IP65 version



Quick Release with Male
& Female connector

SCL366 | LED FIRE RATED DOWNLIGHT -ROTATABLE RANGE


- Slim design for building roof within 40mm height
- Rotatable IP65 version
- 30-60-90 mins fire rated
- Triac dimmable
- Blown insulation coverable
- 4CCT & 2Power selectable by DIP switch on the driver
- 2 parts quick release remote driver with Male & Female connector
- Isolated, flicker free driver output <28VDC solution

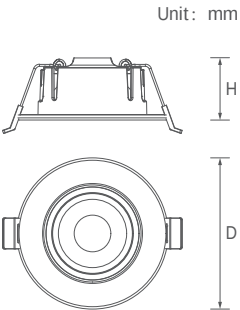

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(ΦD×H)	CUT OUT
SCL366	8/5W	220-240V	720/800/880/800LM	65	Φ90x38MM	Φ65-75mm



Loop-in and loop-out terminal block

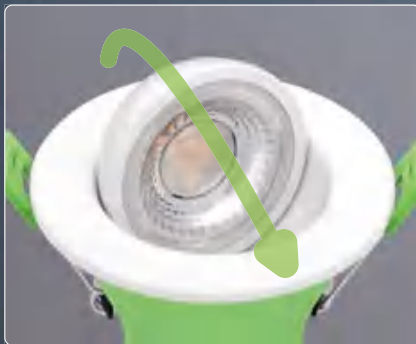


180°adjustable based on one pivot point



Blown Insulation Coverable

SCL388 | LED FIRE RATED DOWNLIGHT -ROTATABLE RANGE

- Rotatable IP65 version
- 30-60-90 mins fire rated
- Triac dimmable
- Blown insulation coverable
- 4CCT & 2Power selectable by DIP switch on the back
- Unique hinged junction box easy for wiring
- Non-isolated, flicker free internal driver solution

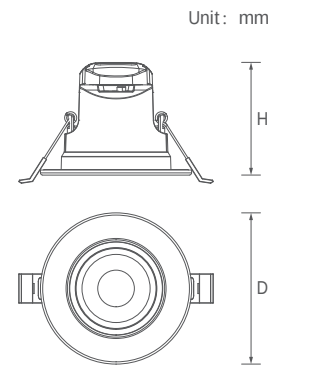

Unit: mm

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(ΦDxH)	CUT OUT
SCL388	8/5W	220-240V	800LM	65	Φ90x54MM	Φ65-75mm



DIM-TO-WARM



2CCT selectable by DIP Switch




Loop-in and loop-out terminal block



Quick Release with Male & Female connector

SCL418 | LED FIRE RATED DOWNLIGHT
-FIXED RANGE

- Fixed IP65 (Front) / IP5X (Back) version
- 30-60-90 mins fire rated
- Triac dimmable
- Blown insulation coverable
- 2CCT selectable by DIP switch on the driver
- 2 parts quick release remote driver with Male & Female connector
- Isolated flicker free remote driver
- Interchangeable alu bezels for option

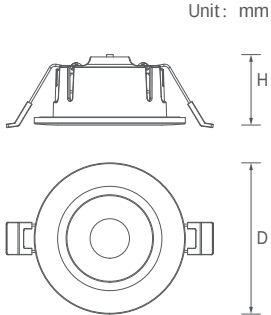

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(ΦD×H)	CUT OUT
SCL418	8W	220-240V	800LM	65	Φ87x38MM	Φ65mm

LED FIRE RATED
DOWNLIGHT



2-part design with quick release connector





Slim Design For More Application



4CCT & 2Power Selectable By DIP Switch

SCL367E | LED FIRE RATED DOWNLIGHT
-FIXED RANGE

- Slim design for building roof within 40mm height
- Fixed IP65 version
- 30-60-90 mins fire rated
- Triac dimmable
- Blown insulation coverable
- 4CCT & 2Power selectable by DIP switch under bezel
- 2 parts quick release junction box
- Interchangeable bezels for option

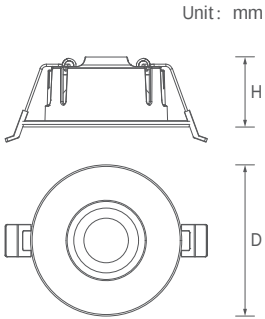
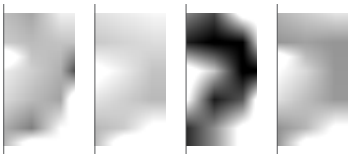


ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(ΦD×H)	CUT OUT
SCL367E	7/5W	220-240V	700LM	65	Φ87x38MM	Φ65-75mm

SCL367

LED FIRE RATED DOWNLIGHT
-FIXED RANGE

- Slim design for building roof within 40mm height
- Fixed IP65 version
- 30-60-90 mins fire rated
- Triac dimmable
- Blown insulation coverable
- 4CCT & 2Power selectable by DIP switch on the driver
- 2 parts quick release remote driver with Male & Female connector
- Interchangeable alu bezels for option

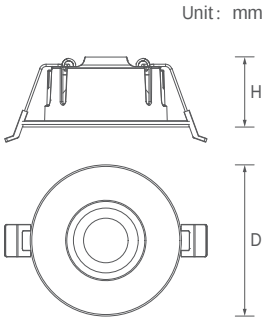



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)	CUT OUT
SCL367	8/5W	220-240V	800/800/880/800LM	65	φ87x38MM	φ65-75mm

SCL420E

SLIM LED FIRE RATED DOWNLIGHT
-FIXED RANGE

- Slim design for building roof within 40mm height
- Fixed IP65 version
- 30-60-90 mins fire rated
- Triac dimmable
- Blown insulation coverable
- 4CCT & 2Power selectable by DIP switch under bezel
- 2 parts quick release junction box
- Interchangeable bezels for option

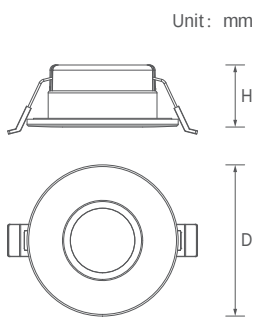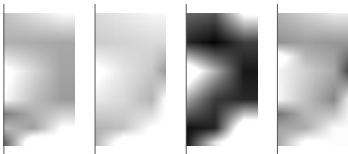


ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)	CUT OUT
SCL420E	7/5W	220-240V	770LM	65	φ87x39MM	φ68MM

SCL420

SLIM LED FIRE RATED DOWNLIGHT
-FIXED RANGE

- Slim design for building roof within 40mm height
- Fixed IP65 version
- 30-60-90 mins fire rated
- Triac dimmable
- Blown insulation coverable
- 4CCT & 2Power selectable by DIP switch on the driver
- 2 parts quick release remote driver
- Interchangeable bezels for option

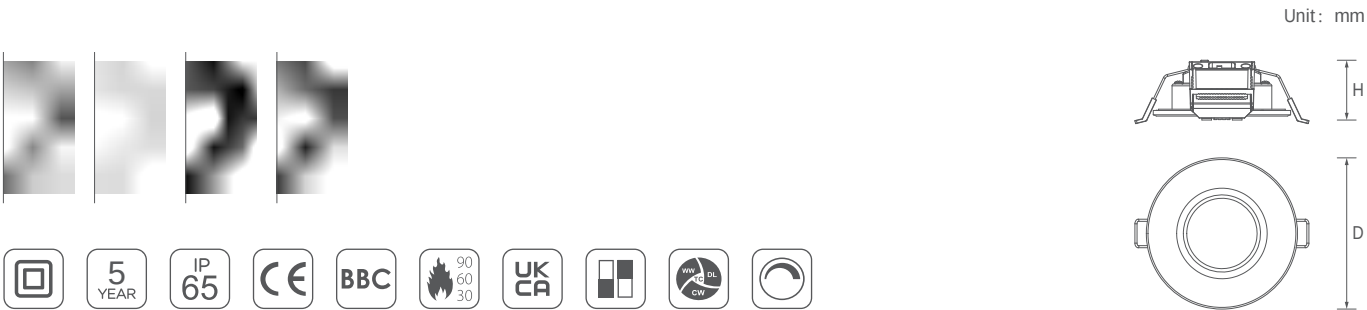

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φD×H)	CUT OUT
SCL420	6/4W	220-240V	620/720/720/620LM	65	φ86x35MM	φ63-75MM

SCL421

SLIM LED FIRE RATED DOWNLIGHT
- TILTABLE RANGE

- Slim design for building roof within 40mm height
- Tilttable IP65 version
- 30-60-90 mins fire rated
- Triac dimmable
- Blown insulation coverable
- 4CCT & 2Power selectable by DIP switch on the driver
- 2 parts quick release remote driver
- Interchangeable bezels for option




ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φD×H)	CUT OUT
SCL421	6/4W	220-240V	540/600/600/540LM	65	φ86x45MM	φ59-72MM



SCL421B

BBC DOWNLIGHT
- TILTABLE RANGE

- Slim design for building roof within 40mm height
- Tilttable IP65 version
- 30-60-90 mins fire rated
- Triac dimmable
- Blown insulation coverable
- 4CCT & 2Power selectable by DIP switch on the driver
- 2 parts quick release remote driver
- Interchangeable bezels for option
- Meet airtightness with BBC standard


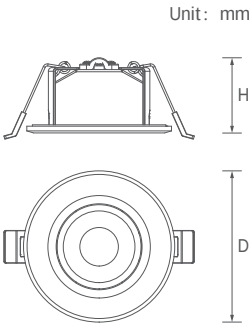


ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φD×H)	CUT OUT
SCL421B	6/4W	220-240V	540/600/600/540LM	65	φ86x45MM	φ59-72MM

SCL331/ SCL331E

LED FIRE RATED DOWNLIGHT
-ECO RANGE

- Fixed IP65 version
- 30-60-90 mins fire rated
- Triac dimmable
- Blown insulation coverable
- 3CCT selectable by DIP switch on the back
- Separate junction box with loop in & out terminal blocks
- Interchangeable bezels for option

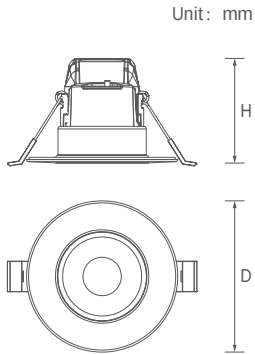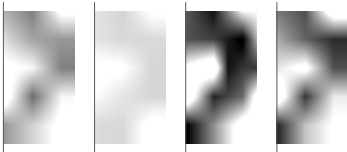


ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)	CUT OUT
SCL331	6W	220-240V	540/600/540LM	65	φ86x49MM	φ53-70MM
SCL331E	6W	220-240V	540/600/540LM	65	φ86x46MM	φ53-70MM

SCL331M

LED FIRE RATED DOWNLIGHT
-ECO RANGE

- Fixed IP65 version
- 30-60-90 mins fire rated
- Triac dimmable
- Blown insulation coverable
- 4CCT selectable by DIP switch on the back
- Separate junction box with loop in & out terminal blocks
- Interchangeable bezels for option
- Non-isolated, flicker free internal driver solution


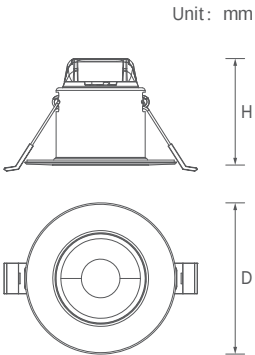


ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)	CUT OUT
SCL331M	5W	220-240V	540/600/600/540LM	65	φ86x47MM	φ55-68MM

SCL335

LED FIRE RATED DOWNLIGHT
- TILTABLE RANGE

- Tilttable IP65 version
- 30-60-90 mins fire rated
- Triac dimmable
- Blown insulation coverable
- 3CCT selectable by DIP switch on the back
- Separate junction box with loop in & out terminal blocks
- Interchangeable bezels for option
- Non-isolated, flicker free internal driver solution

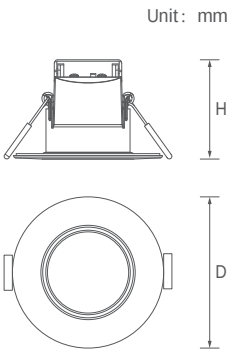
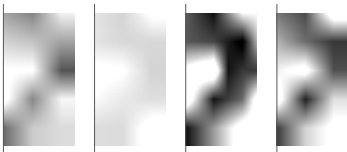


ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)	CUT OUT
SCL335	6W	220-240V	540/600/540LM	65	φ88x66MM	φ56-70MM

SCL328

LED FIRE RATED DOWNLIGHT
- ANTI-GLARE RANGE

- Anti-glare range with UGR<19
- High Colour rendering index (CRI) >90
- Fixed IP65 version
- 30-60-90 mins fire rated
- Triac dimmable
- Blown insulation coverable
- 4CCT & 2Power selectable by DIP switch on the driver
- 2 parts quick release junction box
- Interchangeable bezels for option

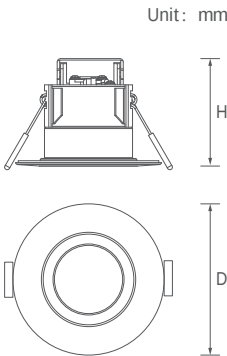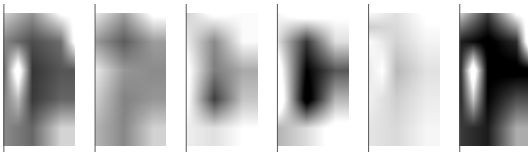

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)	CUT OUT
SCL328	6/4W	220-240V	510/570/630/600LM	65	φ86x53MM	φ62-68MM


SLIM, DISCREET, CONTEMPORARY
AND DETACHABLE BEZELS



SCL360/ SCL362/ SCL364

GU10 FIRE RATED DOWNLIGHT
- ECO RANGE


- GU10 lamp holder
- Available in IP20 & IP65 bezels
- 30-60-90 mins fire rated
- Separate junction box with loop in & out terminal blocks
- Iron & ABS bezels for option

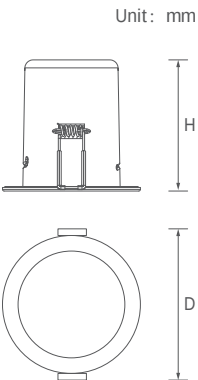

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φD×H)	CUT OUT
SCL360	N/A	220-240V	N/A	20	φ85×86MM	φ65-75MM
SCL362	N/A	220-240V	N/A	20	φ85×86MM	φ65-75MM
SCL364	N/A	220-240V	N/A	65	φ85×86MM	φ65-75MM





MAGNETIC BEZEL
FOR EASY INSTALLATION

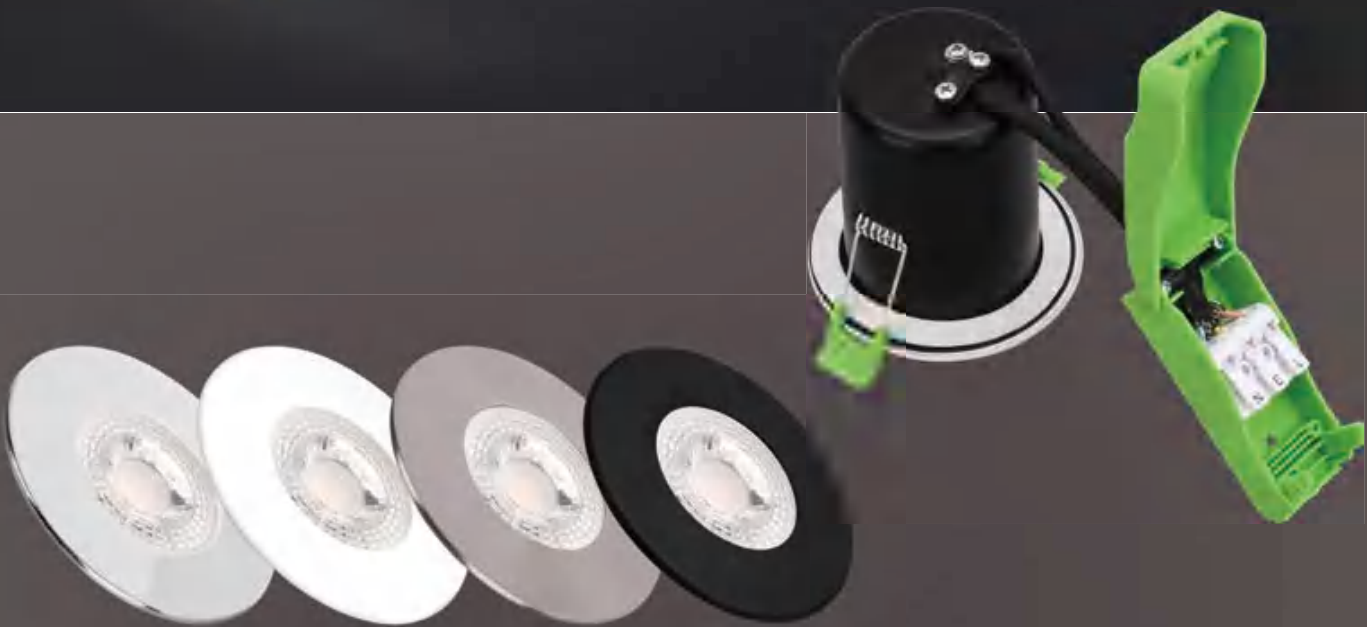

SCL364M | GU10 FIRE RATED DOWNLIGHT
- MAGNETIC RANGE

- GU10 lamp holder
- Available in IP65 bezels
- 30-60-90 mins fire rated
- Separate junction box with loop in & out terminal blocks
- Magnetic bezel & glass cover

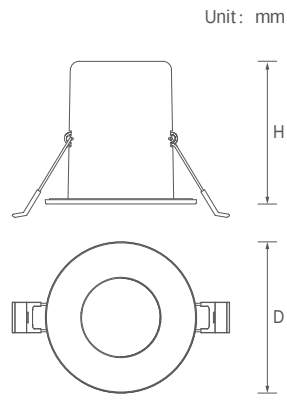
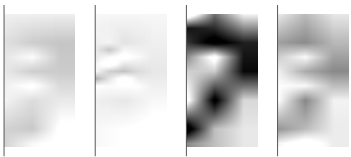


ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)	CUT OUT
SCL364M	N/A	220-240V	N/A	65	φ85x86MM	φ65-75MM

SCL361

GU10 FIRE RATED DOWNLIGHT
- TILTABLE RANGE

- GU10 lamp holder
- Available in IP20 Tilt bezels
- 30-60-90 mins fire rated
- Separate junction box with loop in & out terminal blocks

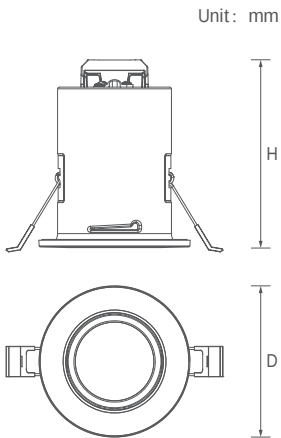
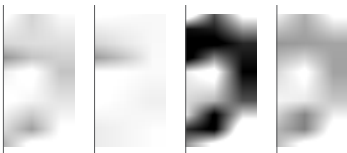


ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(ΦDxH)	CUT OUT
SCL361	N/A	220-240V	N/A	20	Φ86x94MM	Φ72-75MM

SCL384

GU10 FIRE RATED DOWNLIGHT
- OPEN CAN

- GU10 lamp holder
- Available in IP65 bezels
- 30-60-90 mins fire rated
- Separate junction box with loop in & out terminal blocks
- Iron bezel & glass cover

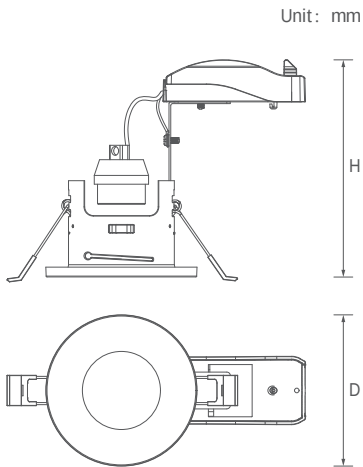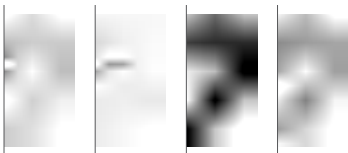

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(ΦDxH)	CUT OUT
SCL384	N/A	220-240V	N/A	65	Φ85x124MM	Φ65-70MM

HUMAN INFRARED INDUCTION

4CCT


ADJUSTABLE HOLD TIME
BETWEEN 30 SECS, 3MINS, 10 MINS AND
OR-ON RUNNING

LUX LEVEL ADJUSTMENT FOR DAYLIGHT,
EVENING OR NIGHT

SMOOTH-ACTION
TOGGLE SWITCH FOR EASY
AND ACCURATE OPERATION

SENSIVITY LEVEL
FROM HIGH-MIDDLE-LOW

▲ SCL415-PIR
► SCL415

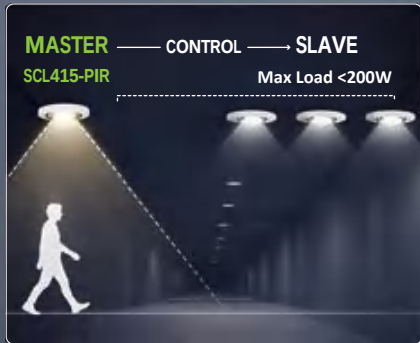

Master and slave function up to 200W



PIR sensor set up by DIP switch for option
under the bezel




Blown Insulation Coverable

SCL415/ SCL415-PIR | PIR
DOWNLIGHT

- 4CCT selectable by DIP switch under bezel
- PIR sensor set up by DIP switch for option under bezel
- Blown insulation coverable
- IP65(front) / IP5X(back)
- Magnetic Interchangeable Iron Bezel



PIR sensor for option

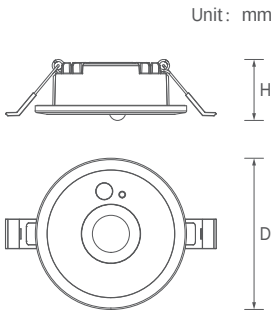


ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(ΦD×H)	CUT OUT
SCL415	4/6W	220-240V	720LM	65	φ88x32MM	φ68MM
SCL415-PIR	6.5W	220-240V	720LM	65	φ88x34MM	φ68MM

SCL382

ECO SPOT LIGHT
SLIM DESIGN

- 18MM ultra slim design
- Tilttable version
- 3CCT selectable by DIP switch
- Loop in and loop out terminal block
- Aluminium trim

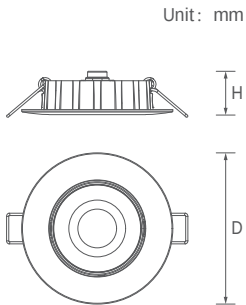

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(ΦD×H)	CUT OUT
SCL382	5W	220-240V	520LM	20	Φ80×18MM	Φ62-68MM



ECO SPOT LIGHT

SLIM DESIGN



3CCT Selectable By DIP Switch



Loop in and loop out terminal block



Slim design for more applications

SCL382N

ALU SPOT LIGHT
SLIM DESIGN


- 27MM Ultra slim tiltable design
- Robust die-casting aluminum housing
- 2Power selectable by DIP switch
- 3CCT selectable by DIP switch
- IP54(front) / IP5X(back)
- Loop in and loop out terminal block



2Power & 3CCT selectable by DIP switch



Unit: mm

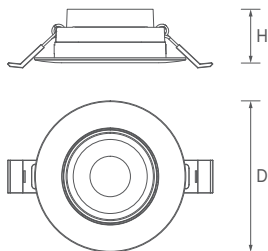

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(ΦD×H)	CUT OUT
SCL382N	7/5W	220-240V	700/500LM	54	Φ80×27MM	Φ68-75MM

TILTABLE DESIGN


FOR FLEXIBLE LIGHT DIRECTION



BBC airtightness



Loop-in and loop-out terminal block

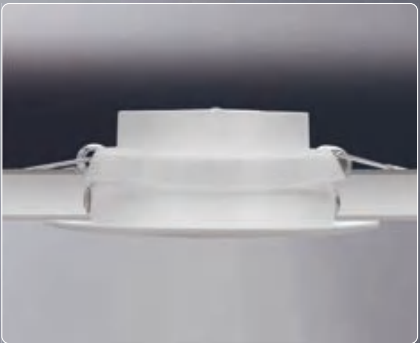

Slim design for more applications



SLIM


DESIGN
FOR
MORE APPLICATIONS

SCL353D | **ECO SPOT LIGHT**
-TILTABLE RANGE

- 35mm slim design
- 3CCT selectable by DIP switch
- Multiple trim finishes optional



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(ΦD×H)	CUT OUT
SCL353D	4W	220-240V	350/420/380LM	40	Φ90x35MM	Φ68MM

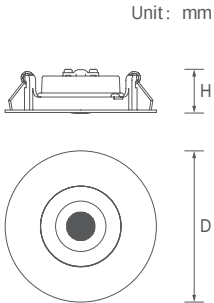

28/ 40MM SLIM DESIGN



BLOWN INSULATION
COVERABLE

3CCT SELECTABLE
BY DIP SWITCH



40mm



28mm



SCL354D | ECO SPOT LIGHT
-FIXED RANGE


- 28mm slim design
- Trim selectable
- IP65 rated from front face
- Triac dimmable
- With big terminal block option
- Blown insulation coverable
- 3CCT selectable by DIP switch



Trim optional



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φD×H)	CUT OUT
SCL354D	4W	220-240V	420LM	65	φ88x28MM	φ62-68MM

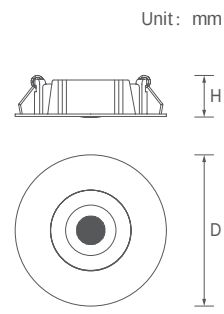

COMBINED DOWNLIGHT

One module with multiple reflectors



ITEM: SCL410-TA
SIZE: $\phi 93 \times H 54 \text{MM}$
CUT OUT: $\phi 85 \text{MM}$



ITEM: SCL410-BR
SIZE: $\phi 85 \times H 40 \text{MM}$
CUT OUT: $\phi 75 \text{MM}$



ITEM: SCL410-TB
SIZE: $\phi 85 \times H 40 \text{MM}$
CUT OUT: $\phi 75 \text{MM}$



ITEM: SCL410-TG-Black
SIZE: $W 93 \times D 93 \times H 29 \text{MM}$
CUT OUT: $\phi 75 \text{MM}$



ITEM: SCL410-TG-White
SIZE: $W 93 \times D 93 \times H 29 \text{MM}$
CUT OUT: $\phi 75 \text{MM}$



ITEM: SCL410-TD
SIZE: $W 90 \times D 90 \times H 25 \text{MM}$
CUT OUT: $\phi 75 \text{MM}$



ITEM: SCL410-TE
SIZE: $\phi 91 \times H 25 \text{MM}$
CUT OUT: $\phi 75 \text{MM}$



ITEM: SCL410-TF-White
SIZE: $\phi 86 \times H 40 \text{MM}$
CUT OUT: $\phi 70 \text{MM}$



ITEM: SCL410-TF-Rose Gold
SIZE: $\phi 86 \times H 40 \text{MM}$
CUT OUT: $\phi 70 \text{MM}$



ITEM: SCL410-TF-Brushed Gold
SIZE: $\phi 86 \times H 40 \text{MM}$
CUT OUT: $\phi 70 \text{MM}$



ITEM: SCL410-TG
SIZE: $W 93 \times D 93 \times H 29 \text{MM}$
CUT OUT: $\phi 75 \text{MM}$



ITEM: SCL410-TH
SIZE: $\phi 90 \times H 40 \text{MM}$
CUT OUT: $\phi 80 \text{MM}$



ITEM: SCL410-TI-Brushed Silver
SIZE: $\phi 86 \times H 40 \text{MM}$
CUT OUT: $\phi 70 \text{MM}$



ITEM: SCL410-TI-White
SIZE: $\phi 89 \times H 40 \text{MM}$
CUT OUT: $\phi 70 \text{MM}$



ITEM: SCL410-TJ
SIZE: $\phi 90 \times H 40 \text{MM}$
CUT OUT: $\phi 80 \text{MM}$



ITEM: SCL410-RWG
SIZE: $\phi 90 \times H 40 \text{MM}$
CUT OUT: $\phi 80 \text{MM}$



ITEM: SCL410-TK-Polished Gold
SIZE: $\phi 90 \times H 31 \text{MM}$
CUT OUT: $\phi 75 \text{MM}$



ITEM: SCL410-TK-Charme
SIZE: $\phi 90 \times H 31 \text{MM}$
CUT OUT: $\phi 75 \text{MM}$



ITEM: SCL410-TL
SIZE: $\phi 90 \times H 29 \text{MM}$
CUT OUT: $\phi 75 \text{MM}$



ITEM: SCL410-SW
SIZE: $W 86 \times D 86 \times H 40 \text{MM}$
CUT OUT: $\phi 70 \text{MM}$



ITEM: SCL410-SB
SIZE: $W 86 \times D 86 \times H 40 \text{MM}$
CUT OUT: $\phi 70 \text{MM}$



ITEM: SCL410-TM
SIZE: $\phi 90 \times H 29 \text{MM}$
CUT OUT: $\phi 75 \text{MM}$



ITEM: SCL410-RBO
SIZE: $\phi 90 \times H 29 \text{MM}$
CUT OUT: $\phi 75 \text{MM}$



ITEM: SCL410-RWO
SIZE: $\phi 90 \times H 29 \text{MM}$
CUT OUT: $\phi 75 \text{MM}$



ITEM: SCL410-TN
SIZE: $\phi 110 \times H 29 \text{MM}$
CUT OUT: $\phi 75 \text{MM}$



ITEM: SCL410-TQ
SIZE: $\phi 160 \times H 70 \text{MM}$
CUT OUT: $\phi 140 \text{MM}$


SCL410

DIE-CASTING ALU
LED MODULE WITH MULTIPLE REFLECTORS

- LED Module
- Robust die-casting aluminum housing
- UGR<19
- COB LED type
- 3CCT selectable by DIP switch
- Flicker free remote driver
- Interchangeable Aluminum Alloy / ABS reflector



3CCT selectable by DIP switch

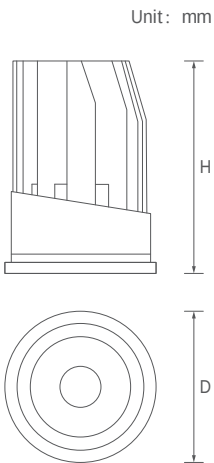

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φD×H)	CUT OUT
SCL410	8W	220-240V	800LM	20	φ40x69MM	/
SCL410	18W	220-240V	1800LM	20	φ62x75MM	/


SCL430

DIE-CASTING ALU
LED MODULE WITH MULTIPLE REFLECTORS

- LED Module
- Robust die-casting aluminium housing
- UGR<19
- COB type
- Flicker free remote driver
- Interchangeable Aluminum Alloy / ABS reflector



Isolated flicker free driver

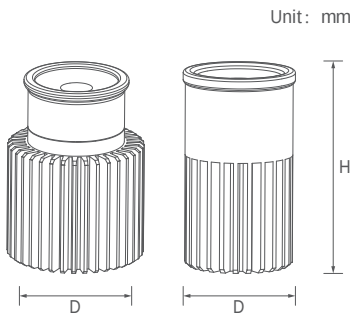

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φD×H)	CUT OUT
SCL430	7W	220-240V	630LM	20	φ50x62MM	/
SCL430	10W	220-240V	900LM	20	φ50x77MM	/
SCL430	12W	220-240V	1080LM	20	φ50x88MM	/
SCL430	15W	220-240V	1350LM	20	φ50x80MM	/
SCL430	20W	220-240V	1800LM	20	φ50x88MM	/

COMBINED DOWNLIGHT

One module with multiple reflectors




ITEM: SCL387R
SIZE: $\phi 88 \times H30 \text{MM}$
CUT OUT: $\phi 68 \text{MM}$



ITEM: SCL387S
SIZE: $W88 \times D88 \times H30 \text{MM}$
CUT OUT: $\phi 68 \text{MM}$



ITEM: SCL387R-IP65
SIZE: $\phi 88 \times H30 \text{MM}$
CUT OUT: $\phi 68 \text{MM}$



ITEM: SCL387S-IP65
SIZE: $W88 \times D88 \times H30 \text{MM}$
CUT OUT: $\phi 68 \text{MM}$



ITEM: SCL387R-R
SIZE: $\phi 88 \times H30 \text{MM}$
CUT OUT: $\phi 68 \text{MM}$



ITEM: SCL387S-R
SIZE: $W88 \times D88 \times H30 \text{MM}$
CUT OUT: $\phi 68 \text{MM}$



ITEM: SCL387R-R-IP65
SIZE: $\phi 88 \times H30 \text{MM}$
CUT OUT: $\phi 68 \text{MM}$



ITEM: SCL387S-R-IP65
SIZE: $W88 \times D88 \times H30 \text{MM}$
CUT OUT: $\phi 68 \text{MM}$



ITEM: SCL431-RW-TN
SIZE: $\phi 83 \times H26 \text{MM}$
CUT OUT: $\phi 70 \text{MM}$



ITEM: SCL431-SW-TN
SIZE: $W83 \times D83 \times H24 \text{MM}$
CUT OUT: $\phi 70 \text{MM}$



ITEM: SCL431-RW-T
SIZE: $\phi 106 \times H25 \text{MM}$
CUT OUT: $\phi 90 \text{MM}$



ITEM: SCL431-SW-T
SIZE: $W110 \times D110 \times H39 \text{MM}$
CUT OUT: $\phi 95 \text{MM}$



ITEM: SCL431-RWB-A
SIZE: $\phi 100 \times H40 \text{MM}$
CUT OUT: $\phi 92 \text{MM}$



ITEM: SCL431-SWB-A
SIZE: $W100 \times D100 \times H33 \text{MM}$
CUT OUT: $91 \times 91 \text{MM}$



ITEM: SCL431-RW2-A
SIZE: $\phi 84 \times H50 \text{MM}$
CUT OUT: $\phi 78 \text{MM}$



ITEM: SCL431-SW2-A
SIZE: $W100 \times D100 \times H67 \text{MM}$
CUT OUT: $91 \times 91 \text{MM}$



ITEM: SCL431-RWG-T-U
SIZE: $\phi 85 \times H31 \text{MM}$
CUT OUT: $\phi 75 \text{MM}$




ITEM: SCL431-RWB-U
SIZE: $\phi 84 \times H50 \text{MM}$
CUT OUT: $\phi 78 \text{MM}$

SCL128 | SLIM ALU. DOWNLIGHT

- Slim die-casting aluminium housing
- 3CCT selectable by DIP switch
- Triac dimmable
- COB solution
- IC-4 rated
- IP40 rated from front face
- 90mm cut out
- Flicker free remote driver
- With SAA approval flex & plug



Alu housing + remote driver



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE($\phi D \times H$)	CUT OUT
SCL128	10W	220-240V	800LM	40	$\phi 100 \times 38 \text{MM}$	$\phi 90 \text{MM}$


SCL309

ANTI-GLARE DOWNLIGHT
-FIXED IP44 RANGE

- Anti-glare range with UGR<19
- 4CCT selectable by DIP switch
- Triac dimmable
- IC-4 rated
- IP44 rated from front face
- 75 & 90mm cut out
- With SAA approval flex & plug



4CCT selectable by DIP switch

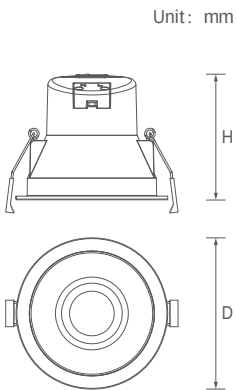

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)	CUT OUT
SCL309	6W	220-240V	480/540/480LM	20	φ90x73MM	φ73-80MM
SCL309	8W	220-240V	800/880/800/800LM	44	φ103x85MM	φ90-95MM


SCL309B

ANTI-GLARE DOWNLIGHT
-TILTABLE IP20 RANGE

- Anti-glare range with UGR<19
- 3CCT selectable by DIP switch
- Triac dimmable
- IC-4 rated
- 90mm cut out
- Tilttable IP20 range
- With SAA approval flex & plug



3CCT selectable by DIP switch

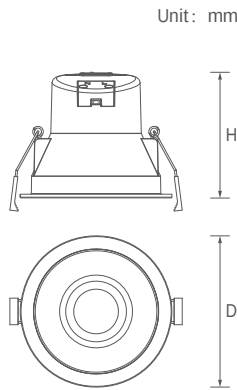

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)	CUT OUT
SCL309B	8W	220-240V	720/800/720LM	20	φ105x87MM	φ90-100MM


SCL319

LOW GLARE DOWNLIGHT
-EXTERNAL DRIVER

- Anti-glare range with UGR<19
- Flicker free remote driver
- 3CCT selectable by DIP switch
- Triac dimmable
- IC-4 rated
- IP44 rated from front face
- 90mm cut out
- With SAA approval flex & plug



Flicker free remote driver

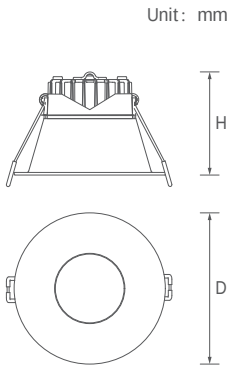

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(ΦDxH)	CUT OUT
SCL319	8W	220-240V	800/880/800LM	44	φ108x60MM	φ80-90MM


SCL396

SAA APPROVAL
ECO DOWNLIGHT

- φ90 cutout downlight
- IP44 rated from front face
- Triac dimmable
- Recessed and flush trim optional
- 4CCT & 3Power changeable by DIP switch
- With SAA approval flex & plug



4CCT & 3Power changeable by DIP switch

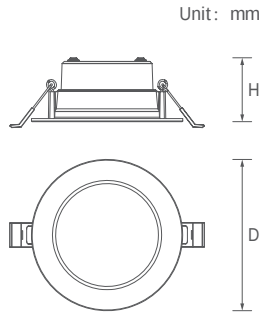

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(ΦDxH)	CUT OUT
SCL396	9/7/5W	220-240V	1080/1260/1260/1080LM	44	φ108x46MM	φ90MM


SCL314

ONE-PIECE
DOWNLIGHT

- One piece structure
- 3CCT selectable by DIP switch
- Triac dimmable
- IC-4 rated
- IP44 rated from front face
- 90mm cut out
- Recessed and flush trim optional
- With SAA approval flex & plug



LOGO HERE

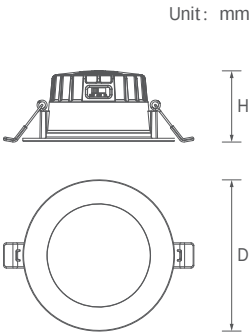

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φD×H)	CUT OUT
SCL314	8W	220-240V	650/750/650LM	44	φ108x50MM	φ90-100MM


SCL375

ONE-PIECE
DOWNLIGHT

- 3CCT selectable by DIP switch
- Triac dimmable
- IC-4 rated
- IP44 rated from front face
- 90mm cut out
- Flush trim
- With SAA approval flex & plug



3CCT selectable by DIP switch

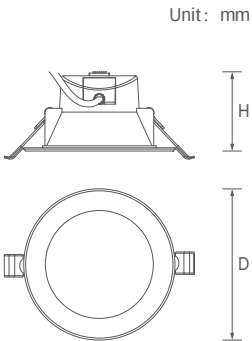

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φD×H)	CUT OUT
SCL375	8W	220-240V	800LM	44	φ115x60MM	φ90MM

SCL326

SLIM PROFILE
DOWNLIGHT


- 40mm slim profile
- 3CCT selectable by DIP switch
- Triac dimmable
- IC-4 rated
- IP44 rated from front face
- 90mm cut out
- Recessed and flush trim for option
- With SAA approval flex & plug



40mm slim profile



40MM

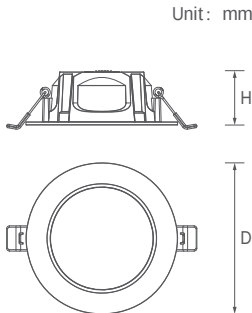

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(ΦDxH)	CUT OUT
SCL326	8W	220-240V	650/720/650LM	44	Φ108x40MM	Φ85-95MM


SCL343

ECO EU DOWNLIGHT
-IP65 RATED


- 3CCT selectable by DIP switch
- Built-in loop in and loop out terminals
- IP65 rated from front
- Round & Square for option
- Multiple trim finishes optional



Loop In & Out Design



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(ΦDxH)	CUT OUT
SCL343R	4.5W	220-240V	450/480/460LM	65	Φ88x45MM	Φ75-80MM
SCL343S	4.5W	220-240V	450/480/460LM	65	88x88x45MM	Φ75-80MM

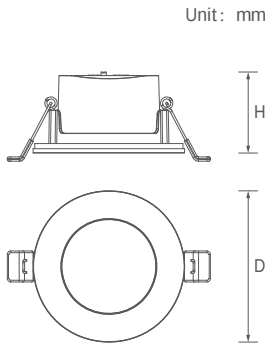


SCL132

LED DOWNLIGHT
-CLASSICAL DESIGN

- 3CCT selectable by DIP switch
- Separate junction box for option
- Triac dimmable
- Blown insulation coverable
- Eva cotton back on the trim
- Tuya smart control



Blown Insulation Coverable

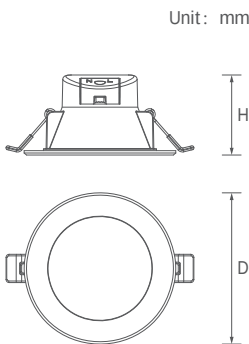

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)	CUT OUT
SCL132	6W	220-240V	540LM	44	φ92x55MM	φ70-85MM
SCL132	8W	220-240V	720LM	44	φ115x60MM	φ90MM
SCL132	12W	220-240V	1080LM	44	φ140x65MM	φ110MM
SCL132	18W	220-240V	1620LM	44	φ190x70MM	φ155-160MM
SCL132	24W	220-240V	2160LM	44	φ235x85MM	φ190-200MM


SCL270

LOW PROFILE
DOWNLIGHT

- 29mm low profile to suit all applications
- CCT selectable by DIP switch
- Triac dimmable
- Flicker free remote driver
- IC-4 rated
- IP44 from the front face
- Flush and recessed trim
- With SAA approval flex & plug



29MM Low Profile

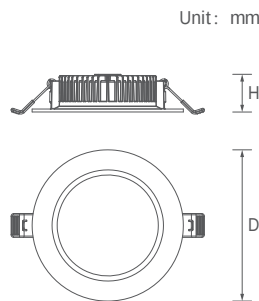

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)	CUT OUT
SCL270	5W	220-240V	450LM	44	φ95x29MM	φ75-85MM
SCL270	8W	220-240V	720LM	44	φ115x29MM	φ90-100MM
SCL270	12W	220-240V	1080LM	44	φ140x29MM	φ110-120MM
SCL270	18W	220-240V	1620LM	44	φ190x29MM	φ155-165MM
SCL270	28W	220-240V	2520LM	44	φ230x29MM	φ190-200MM



ALUMINIUM DOWNLIGHT

LOW GLARE



4CCT selectable by DIP switch



Aluminium housing with good dissipation




Low glare version

SCL374 | LOW GLARE ALU. DOWNLIGHT

- Aluminium housing with good dissipation
- Low glare commercial range
- 4CCT & Power selectable by DIP switch
- Triac dimmable for option
- IP44 from the front face
- Flicker free remote driver
- Aluminium reflector option with UGR<22



4CCT selectable by DIP switch

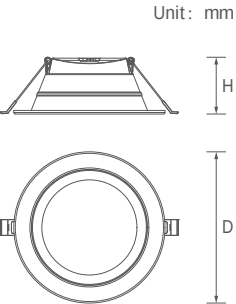

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(ΦDxH)	CUT OUT
SCL374	8/12W	220-240V	960/1440LM	44	Φ113x55MM	Φ90-100MM
SCL374	10/15W	220-240V	1200/1800LM	44	Φ143x55MM	Φ100-130MM
SCL374	15/20W	220-240V	1800/2400LM	44	Φ165x61MM	Φ130-155MM
SCL374	18/24W	220-240V	2160/2800LM	44	Φ200x61MM	Φ160-185MM
SCL374	20/25/30W	220-240V	2600/3250/3900LM	44	Φ230x70MM	Φ190-210MM
SCL374	30/35/40W	220-240V	3900/4550/5200LM	44	Φ280x70MM	Φ230-260MM


SCL318N

SLIM ALU.
DOWNLIGHT

- Slim die-casting aluminium housing
- SMD LED type
- 3CCT selectable by DIP switch
- Multi power selectable
- Triac dimmable
- Flicker free remote driver
- IP44 rated from front face
- PMMA diffuser optional



3CCT selectable by DIP switch



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)	CUT OUT
SCL318N	10/12/15W	220-240V	1800LM	44	φ110x36MM	φ100MM
SCL318N	18/20/24W	220-240V	2880LM	44	φ165x36MM	φ150MM
SCL318N	25/30/40W	220-240V	4800LM	44	φ215x36MM	φ200MM


SCL272

SLIM ALU.
DOWNLIGHT

- Slim die-casting aluminium housing
- 3CCT selectable by DIP switch
- IC-4 rated
- Flicker free remote driver
- Traic dimmable optional
- IP44 rated from front face



3CCT selectable by DIP switch



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)	CUT OUT
SCL272	7W	220-240V	700LM	44	φ100x33MM	φ75MM
SCL272	10W	220-240V	1000LM	44	φ120x34MM	φ95MM
SCL272	15W	220-240V	1500LM	44	φ145x35MM	φ120MM
SCL272	24W	220-240V	2400LM	44	φ185x36MM	φ155MM
SCL272	30W	220-240V	3000LM	44	φ230x37MM	φ190MM


SCL391

ANTI-GLARE ALU.
DOWNLIGHT

- UGR < 19 Anti-glare range
- Die-casting aluminium housing
- Tilttable version
- Honeycomb lens + PMMA lens
- Triac dimmable version for option
- 3CCT selectable by DIP switch
- Flicker free remote driver



Flicker free remote driver
3CCT selectable by DIP switch



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)	CUT OUT
SCL391	5W	220-240V	400LM	20	φ70x41MM	φ54-60MM
SCL391	7W	220-240V	595LM	20	φ88x47MM	φ74-78MM
SCL391	12W	220-240V	1020LM	20	φ110x57MM	φ94-100MM
SCL391	18W	220-240V	1530LM	20	φ135x63MM	φ114-125MM


SCL393

SLIM ALU.
DOWNLIGHT

- Slim die-casting aluminium housing
- Low glare commercial range
- 3CCT & Power selectable by DIP switch
- Triac dimmable
- IP40 rated from front face
- Flicker free remote driver



Flicker free remote driver



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)	CUT OUT
SCL393	10W	220-240V	1000LM	40	φ100x40MM	φ75MM
SCL393	12W	220-240V	1200LM	40	φ120x45MM	φ90-100MM
SCL393	18W	220-240V	1800LM	40	φ145x50MM	φ115-125MM
SCL393	24W	220-240V	2400LM	40	φ185x55MM	φ145-165MM


SCL409

DIE-CASTING ALU
DOWNLIGHT

- Robust die-casting aluminum housing
- Low glare commercial range
- Ra 90
- COB LED type
- IP65 rated from front face
- Ficker free remote driver



Flicker free remote driver

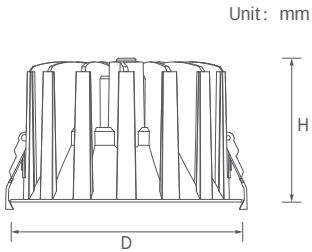

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)	CUT OUT
SCL409	12W	220-240V	1200LM	65	φ86x73MM	φ75MM
SCL409	20W	220-240V	2000LM	65	φ108x83MM	φ95MM
SCL409	30W	220-240V	3000LM	65	φ141x96MM	φ125MM
SCL409	35W	220-240V	3500LM	65	φ160x107MM	φ145MM
SCL409	40W	220-240V	4000LM	65	φ180x120MM	φ165MM
SCL409	50W	220-240V	5000LM	65	φ220x137MM	φ200MM


SCL392

ROTATABLE ALU.
DOWNLIGHT

- Robust die-casting aluminium housing
- Rotatable version
- 3CCT by DIP switch
- Flicker free remote driver



3CCT selectable by DIP switch
Quick release with male & female connector

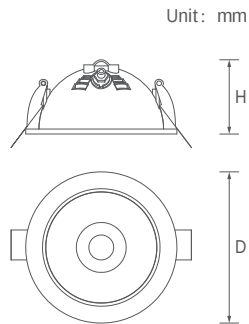

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)	CUT OUT
SCL392	8W	220-240V	720LM	20	φ88x52MM	φ75MM
SCL392	12W	220-240V	1080LM	20	φ111x53MM	φ95MM

SCL373

ANTI-GLARE
DOWNLIGHT


- Robust die-casting aluminium housing
- Anti-glare range with IP65 rating
- Quick release with male and female connector
- Flicker free with remote driver
- Reflector with color option
- 55°/36°/24° angle for option



Quick release with male and femal connector



Unit: mm

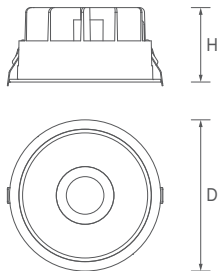

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)	CUT OUT
SCL373	9W	220-240V	810LM	65	φ85x57MM	φ75MM
SCL373	12W	220-240V	1080LM	65	φ105x65MM	φ90MM
SCL373	18W	220-240V	1620LM	65	φ130x75MM	φ115MM
SCL373	24W	220-240V	2160LM	65	φ190x95MM	φ175MM
SCL373	30W	220-240V	2700LM	65	φ215x105MM	φ200MM

SCL401

DIE-CASTING ALU
TILTABLE DOWNLIGHT


- Robust die-casting aluminium housing
- UGR<19
- COB LED type
- Tilttable version
- 3CCT selectable by DIP switch
- Flicker free remote driver
- Interchangeable ABS bezels



CCT selectable by DIP switch



Unit: mm

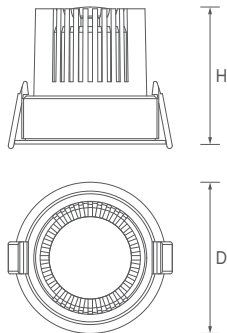

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)	CUT OUT
SCL401	8W	220-240V	800LM	20	φ65x66MM	φ55MM
SCL401	12W	220-240V	1200LM	20	φ85x76MM	φ75MM
SCL401	18W	220-240V	1800LM	20	φ105x95MM	φ95MM


SCL402

DIE-CASTING ALU
FIXED DOWNLIGHT

- Robust die-casting aluminium housing
- UGR<19
- COB LED type
- 3CCT selectable by DIP switch
- Ficker free remote driver
- Interchangeable aluminium bezels



CCT selectable by DIP switch

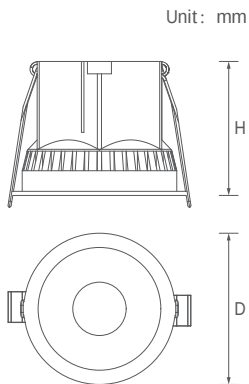

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(ΦD×H)	CUT OUT
SCL402	8W	220-240V	800LM	20	Φ65x55MM	Φ55MM
SCL402	12W	220-240V	1200LM	20	Φ85x65MM	Φ75MM
SCL402	18W	220-240V	1800LM	20	Φ95x72MM	Φ85MM


SCL403

DIE-CASTING ALU
DOWNLIGHT

- Robust die-casting aluminium housing
- UGR<19
- COB LED type
- 3CCT selectable by DIP switch
- Lifud flicker free remote driver
- Interchangeable aluminium bezels



CCT selectable by DIP switch

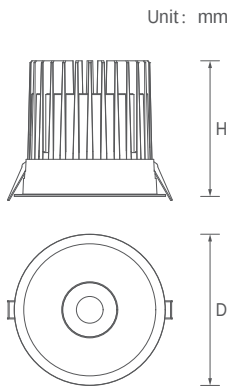

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(ΦD×H)	CUT OUT
SCL403	5W	220-240V	400LM	20	Φ40x69MM	Φ35MM
SCL403	8W	220-240V	720LM	20	Φ62x75MM	Φ55MM
SCL403	12W	220-240V	1200LM	20	Φ83x84MM	Φ75MM
SCL403	20W	220-240V	2000LM	20	Φ105x108MM	Φ95MM
SCL403	30W	220-240V	3000LM	20	Φ133x123MM	Φ120MM
SCL403	40W	220-240V	4000LM	20	Φ159x143MM	Φ145MM


SCL115

ECO PANEL DOWNLIGHT
-SLIM DESIGN

- 17mm ultra slim design
- Flicker free remote driver
- Dimmable options available
- 3CCT selectable by DIP switch
- Plug & Play connector for easy installation



3CCT Selectable by DIP Switch



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φD×H)	CUT OUT
SCL115	3W	220-240V	210LM	20	φ83x17MM	φ70MM
SCL115	6W	220-240V	480LM	20	φ118x17MM	φ100MM
SCL115	9W	220-240V	810LM	20	φ146x17MM	φ130MM
SCL115	12W	220-240V	1080LM	20	φ167x17MM	φ150MM
SCL115	15W	220-240V	1500LM	20	φ187x17MM	φ170MM
SCL115	18W	220-240V	1890LM	20	φ221x17MM	φ200MM
SCL115	20W	220-240V	2100LM	20	φ240x17MM	φ220MM
SCL115	24W	220-240V	2520LM	20	φ296x17MM	φ280MM

SCL413

DIE-CASTING ALU
DOWNLIGHT


- Aluminium housing with good dissipation
- Surface mounted
- COB type
- Ra 90
- Triac dimmable optional
- 10°~55°angle adjustable
- Isolated flicker free driver



Beam angle: Twist to adjust



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φD×H)	CUT OUT
SCL413	10W	220-240V	900LM	20	φ55x105MM	/
SCL413	15W	220-240V	1350LM	20	φ65x115MM	/
SCL413	20W	220-240V	1800LM	20	φ75x125MM	/
SCL413	25W	220-240V	2250LM	20	φ85x130MM	/

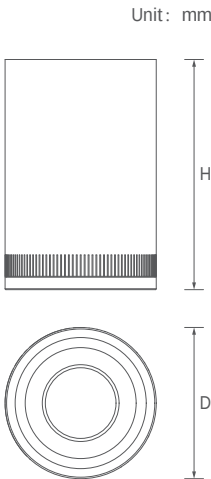

SCL412

DIE-CASTING ALU
DOWNLIGHT


- Aluminium housing with good dissipation
- Surface mounted
- COB type
- Ra 90
- Triac dimmable optional
- 15°/24°/36°/60°angle for option
- Isolated flicker free driver



Easy installation



Unit: mm

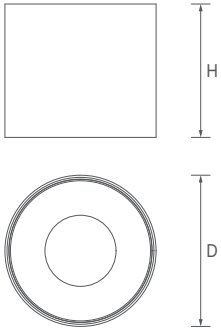

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φD×H)	CUT OUT
SCL412	12W	220-240V	1080LM	20	φ85x74MM	/
SCL412	20W	220-240V	1800LM	20	φ115x95MM	/
SCL412	30W	220-240V	2700LM	20	φ135x111MM	/
SCL412	50W	220-240V	5000LM	20	φ165x136MM	/
SCL412	60W	220-240V	6000LM	20	φ190x157MM	/
SCL412	80W	220-240V	8000LM	20	φ215x176MM	/
SCL412	100W	220-240V	10000LM	20	φ240x201MM	/



HIGH POWER DIMMER

PUSH-ON / PUSH-OFF SWITCH DIMMER FOR RESISTIVE,
INDUCTIVE LV AND INDUCTIVE LED LIGHTING LOADS.



SDM101

DIMMER

74
<<< DIMMER

**Match LED Range Up To 300W
For both trailing and leading**

- Supply: 220/240V 50Hz;
 - $0^{\circ}\text{C} < T_a < +40^{\circ}$
- Loading Information: LV Halogen / Incandescent: 10-400W;
 - LED: 5-250W
- Two / One Way Dimmer Circuit





CABINET LIGHT

VARIOUS STYLES, EASY INSTALLATION,
FIT MULTIPLE SCENARIOS

SCA102 | CABINET LIGHT

- Slim design
- High voltage, fits various application environments
- Backlite, uniform light output
- Recessed mounted installation
- IP44, wider application range



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SCA102-G	2W	230V	150LM	44	Φ65x17MM
SCA102-S	2W	230V	150LM	44	Φ65x13.5MM

SCA169

CABINET LIGHT

- Triangular design
- 3-piece set, 1 main light and 2 slave light
- PIR sensor and hand wave sensor available
- Steel housing,corrosion-resistant
- Recessed and surface mounted installation



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SCA169	2W	DC12V	150LM	20	340x120x47MM

SCA119

CABINET LIGHT

- Hand wave sensor switch ON/OFF and dimming
- Surface mounted installation
- 3-piece set, 1 main light and 2 slave light



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SCA119	2.4W	DC12V	160LM	20	96x72x31MM
SCA119IR	2.4W	DC12V	160LM	20	96x72x31MM

SCA120

CABINET LIGHT

- CCT selectable by DIP switch
- Black, white, stain nickel color trim available
- Recessed and surface mounted installation



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SCA120	3W	220-240V	250LM	20	φ67x25MM

SCA111

CABINET LIGHT

- Ultra slim design
- 5CCT selectable by DIP switch
- Hand wave sensor switch ON/OFF and dimming
- Surface mounted installation
- 3-piece set, 1 main light and 2 slave light



Ultra slim design



Interconnectable



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SCA111IR	4W	DC24V	280LM	20	280x100x9MM
SCA111IR	6W	DC24V	420LM	20	456x100x9MM
SCA111IR	8W	DC24V	560LM	20	574x100x9MM
SCA111IR	4W	DC24V	240LM	20	280x60x9MM
SCA111IR	6W	DC24V	360LM	20	456x60x9MM
SCA111IR	8W	DC24V	560LM	20	574x60x9MM

SCA116

CABINET LIGHT

- Ultra slim design
- Hand wave sensor switch ON/OFF and dimming
- PIR sensor available
- Black, white, silver color trim available
- 3-piece set, 1 main light and 2 slave light
- Surface mounted installation



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SCA116IR	6W	DC12V	400LM	20	192x112x10MM
SCA116PIR	6W	DC12V	400LM	20	192x112x10MM
SCA116IR-A	5W	DC12V	200LM	20	192x112x10MM

SCA118

CABINET LIGHT

- Ultra slim design
- Hand wave sensor ON/OFF and dimming
- Touch switch available
- 3-piece set, 1 main light and 2 slave light
- Premium metallic finish



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SCA118TS	2.5W	DC12V	180LM	20	190x70x4MM
SCA118IR	3W	DC12V	180LM	20	190x70x6MM

SCA175

CABINET LIGHT

- Rotatable design
- Multiple mounting angles
- High voltage, fits various application environments
- 3CCT selectable by DIP switch
- Linkable
- Various sizes available



3CCT selectable by DIP switch



Linkable




ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SCA175	4W	220-240V	400LM	20	297x61x24MM
SCA175	8W	220-240V	800LM	20	545x61x24MM
SCA175	12W	220-240V	1200LM	20	836x61x24MM
SCA175	16W	220-240V	1600LM	20	1134x61x24MM

SCA117

CABINET LIGHT

- Ultra slim design
- Interchangeable magnetic trim
- Various sizes available
- Surface mounted installation

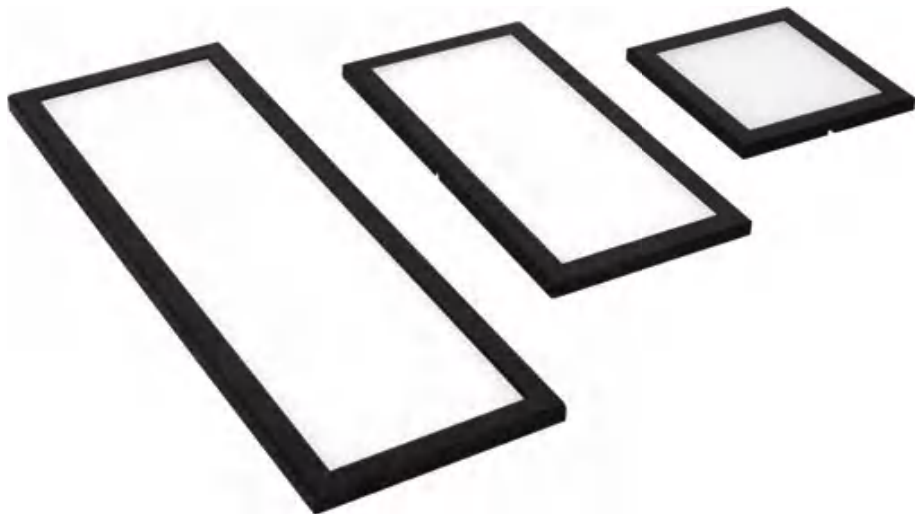

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SCA117	2.4W	DC12V	168LM	20	100x100x7MM
SCA117	4.8W	DC12V	336LM	20	200x100x7MM
SCA117	7.2W	DC12V	504LM	20	300x100x7MM

SCA112

CABINET LIGHT

- Ultra slim design
- Hand wave sensor ON/OFF,dimming and CCT
- High voltage,fits various application environments



Hand wave sensor switch



ON/ OFF switch



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SCA112IR	10W	230V	800LM	20	604x49x14.3MM
SCA112IR	10W	230V	850LM	20	604x49x14.3MM
SCA112IR	10W	230V	800LM	20	604x49x14.3MM
SCA112IR	10W	230V	850LM	20	604x49x14.3MM

SCA113

CABINET LIGHT

- Ultra slim design
- Hand wave sensor ON/OFF,dimming and CCT
- High voltage,fits various application environments
- Various sizes available



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SCA113IR	4W	230V	300LM	20	300x33x12MM
SCA113IR	5.7W	230V	427LM	20	385x33x12MM
SCA113IR	8W	230V	680LM	20	600x33x12MM
SCA113IR	8W	230V	624LM	20	900x33x12MM




BULKHEAD

SUITABLE FOR RESIDENTIAL OR COMMERCIAL APPLICATIONS

SXL122P

GEAR TRAY RETROFIT KIT

- Easy installation and compatibility with a wide range of existing bulkhead housing
- Suitable for brand driver, EM kit & sensor, such as Tridonic, Osram, Streamer, Merrytek
- CCT & Power Selectable by DIP switch
- Emergency, sensor available

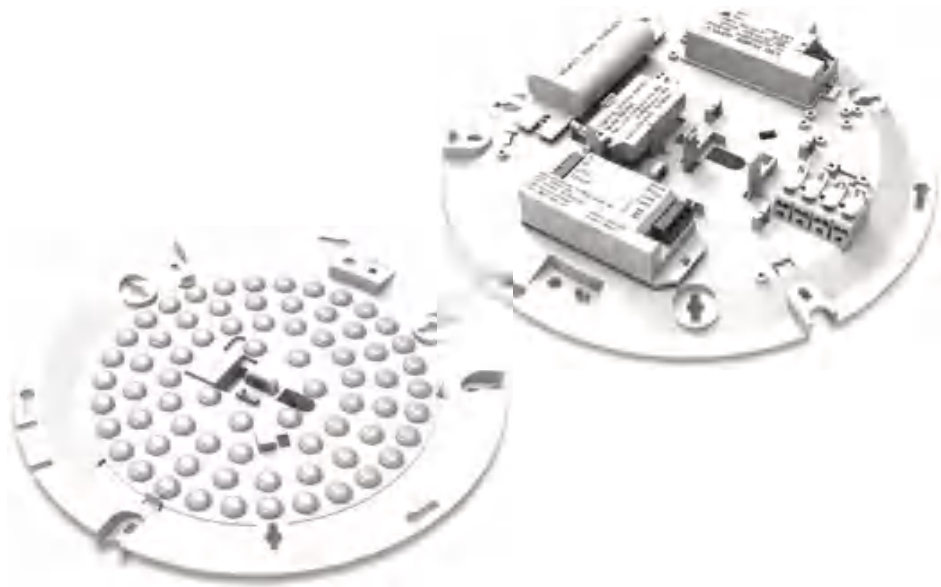


ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)
SXL122P	20W	220-240V	2800LM	NA	φ260x44MM


SXL122E

BULKHEAD

- Slim design with Vertical Straight-Line Profile
- Plug-and-play modular design all in one bulkhead
- 2 colour replaceable rims
- 1 BESA Entry + 3 X M20 Side Entry
- CCT & Power Selectable by DIP switch
- 1 second install plug-in microwave sensor
- 3 second install plug-in emergency pack
- Integrated emergency inverter and battery, with LED indicator light & test button

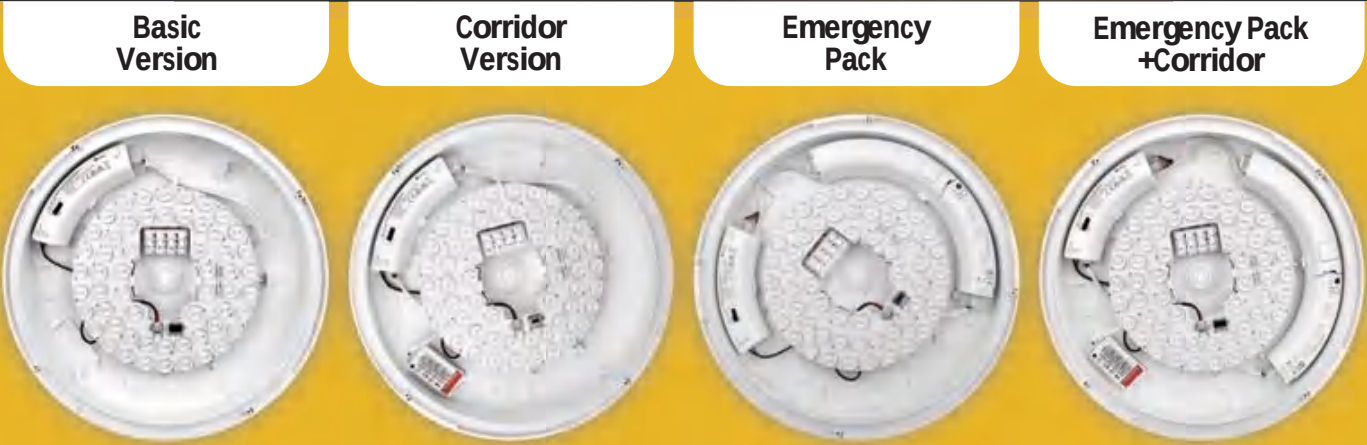

PLUG-IN MODULAR EMERGENCY AND SENSOR PACKS AVAILABLE


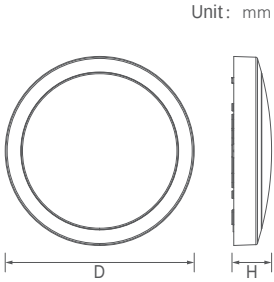


ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(ΦDxH)
SXL122E	12W/15W/18W	220-240V	1200LM/1500LM/1800LM	65	Φ330x70MM


SXL122D

BULKHEAD

- Slim design
- Plug-and-play modular design all in one bulkhead
- 3 colour replaceable trims
- 1 BESA Entry + 3 X M20 Side Entry
- CCT & Power Selectable by DIP switch
- 1 second install plug-in microwave sensor
- 3 second install plug-in emergency pack
- Integrated emergency inverter and battery, with LED indicator light & test button

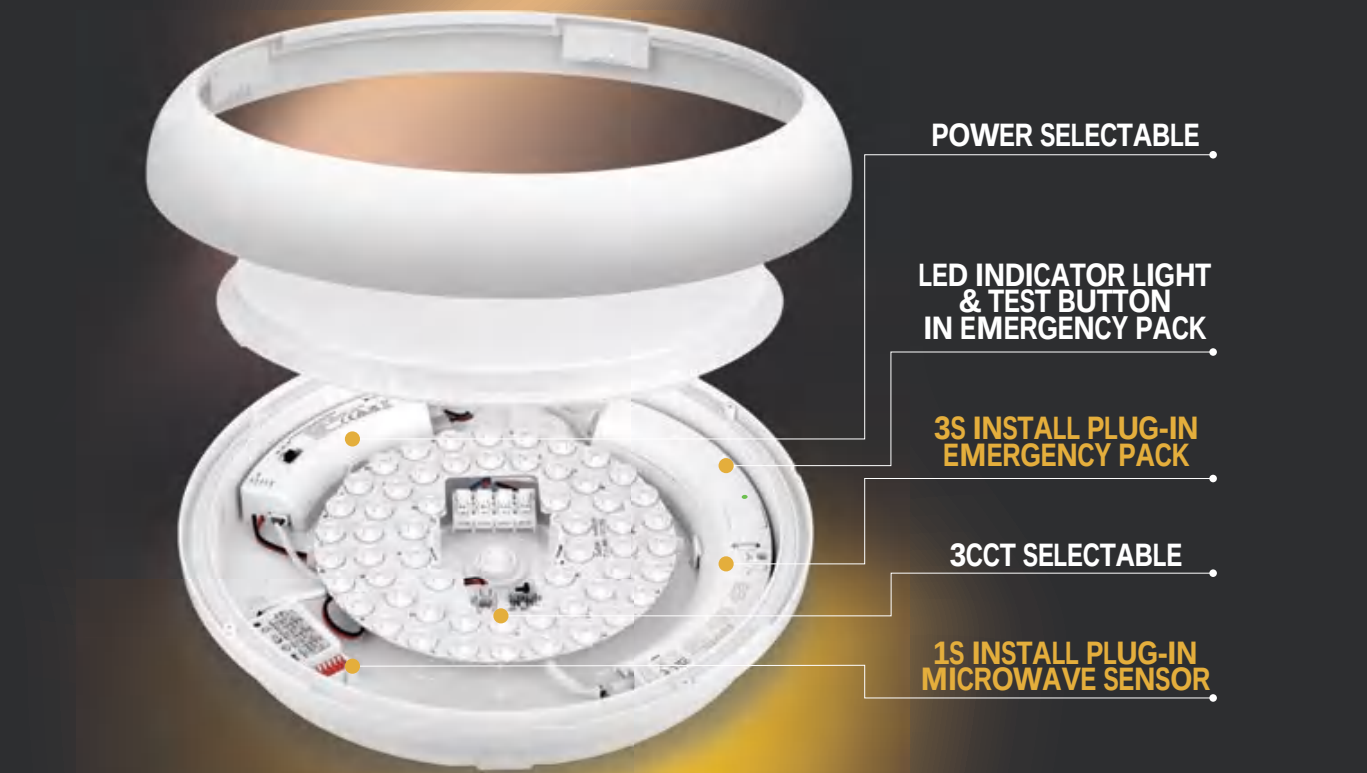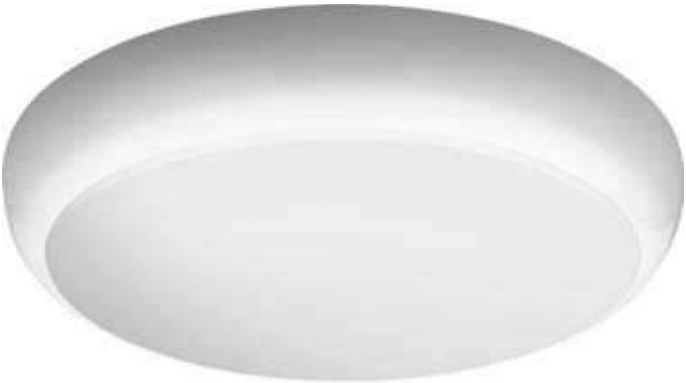

PLUG-IN MODULAR EMERGENCY AND SENSOR PACKS AVAILABLE

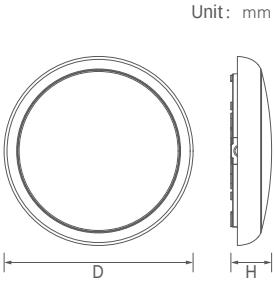


ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(ΦDxH)
SXL122D	12W/15W/18W	220-240V	1200LM/1500LM/1800LM	65	Φ320x68MM


SXL208/ 208H

BULKHEAD

- Anti-theft screw design for more security
- IP66 IK10 for out-door use
- Intergrated gear tray structure, more uniform lighting effect
- DALI driver available
- Microwave sensor & emergency kit with plug-and-play modular design
- Corridor function
- Eyelid for option

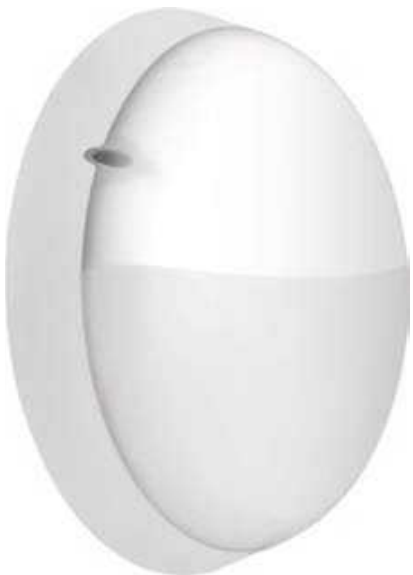

Eyelid for option

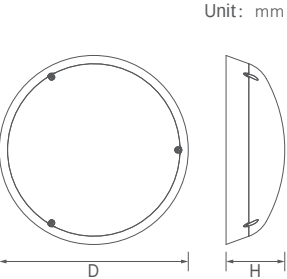

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)
SXL208	15/18/20/24W	220-240V	2800LM	66	φ290x90MM
SXL208H	15/18/20/24W	220-240V	2160LM	66	φ290x90MM



POWER SELECTABLE
& 3 CCT SELECTABLE

4 x LOOP IN LOOP OUT
SIDE ENTRY

EM PACK

Self-test and Manual-test
function switchable

1 x LOOP IN LOOP OUT
BACK ENTRY


EASY INSTALLATION

Push-fit Terminal
For Quick Wiring

Intergrated diffuser
& PCB board structure

MW SENSOR


Stand-by / Corridor function
Switchable to ON/ OFF feature
Setting by DIP or remote control

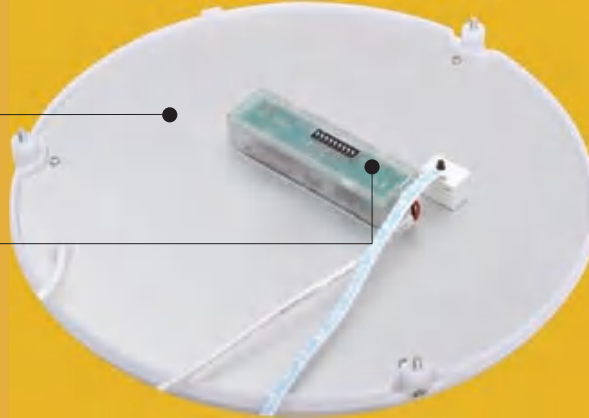

SXL122C

BULKHEAD

- Ultra slim design
- Plug-and-play modular design all in one bulkhead
- 2 colour replaceable trims
- 1 X BESA Entry + 2X M20 Back Entry
- CCT & power selectable by DIP switch
- Emergency, sensor, stand-by function sensor available
- 1 second install plug-in microwave sensor
- 3 second install plug-in emergency pack
- Integrated emergency inverter and battery, with LED indicator light & test button
- High lumen efficiency, up to 120lm/W

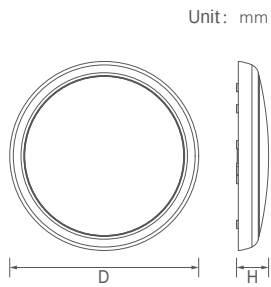

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)
SXL122C	12W/15W/18W	220-240V	2160LM	65	φ300x50MM



EASY INSTALLATION

Push-fit Terminal
For Quick Wiring

2 x M20 BACK ENTRY



Power Selectable



3CCT Selectable

LED Indicator Light
& Test Button
In Emergency Pack

1s Install Plug-In
Microwave Sensor


3s Install Plug-In
Emergency Pack

PLUG-IN MODULAR EMERGENCY AND SENSOR PACKS AVAILABLE

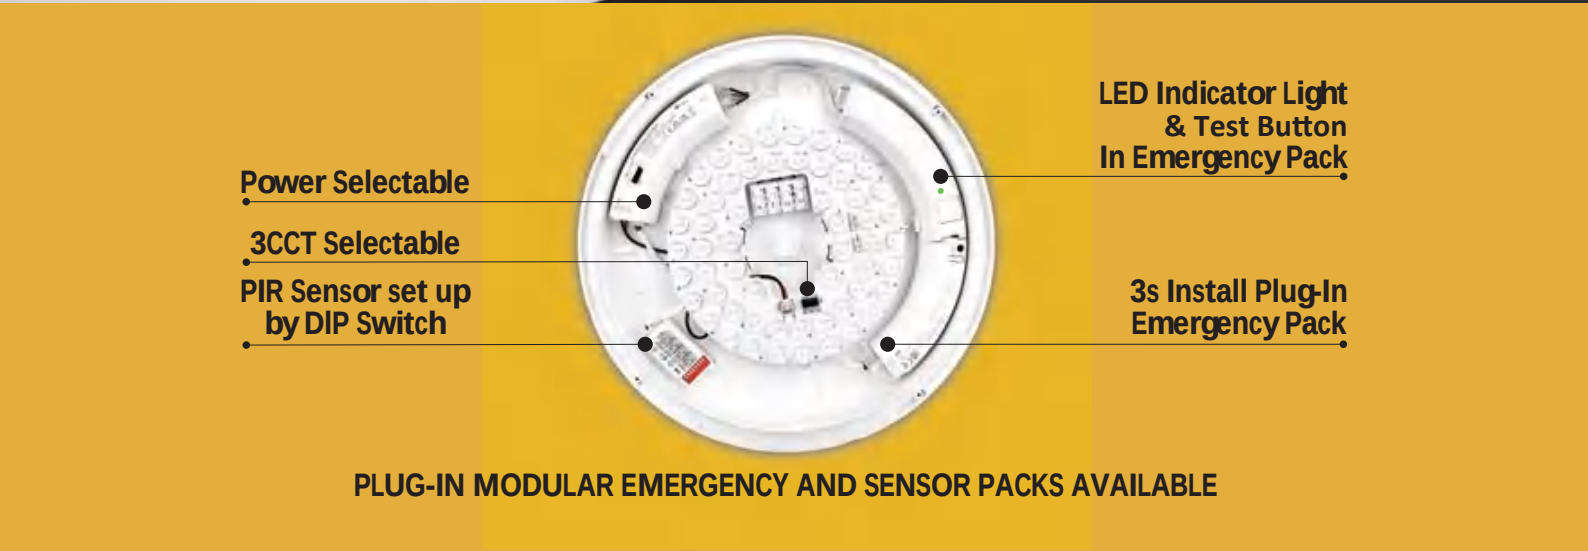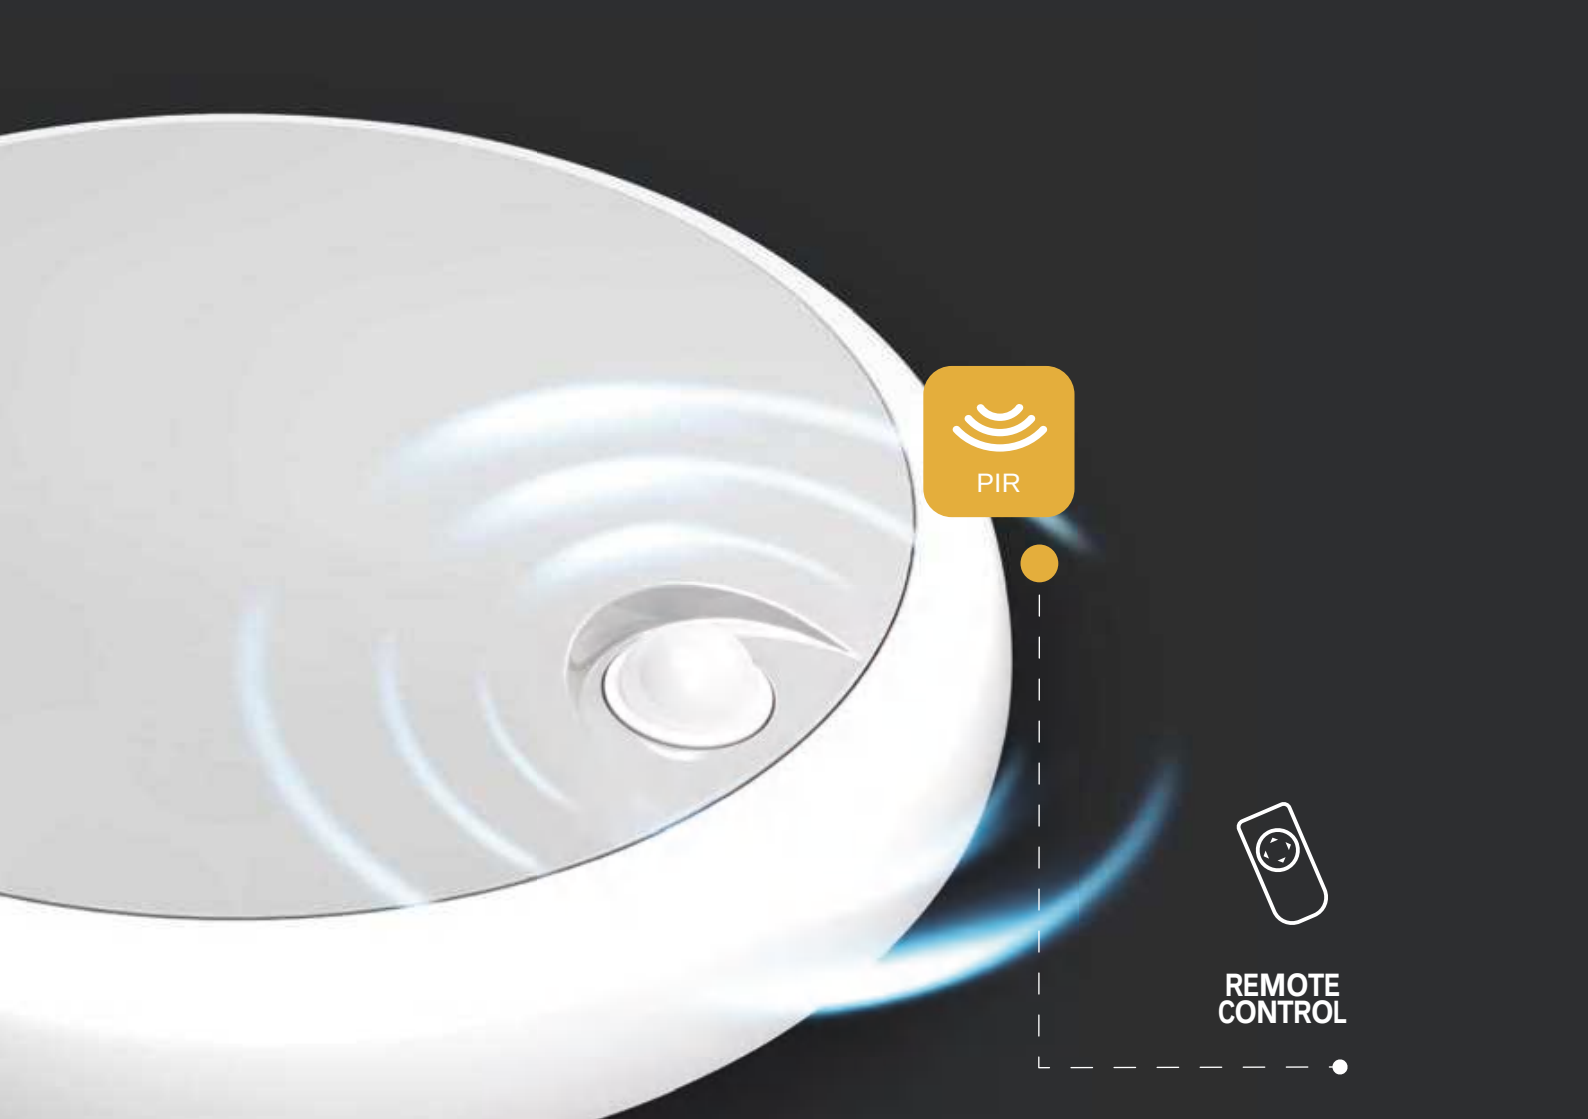

SXL122C-PIR | BULKHEAD

- Ultra slim design
- Plug-and-play modular design all in one bulkhead
- 2 colour replaceable trims
- Integrated emergency inverter and battery, with LED indicator light & test button
- PIR Sensor set up by DIP Switch & Remote Control for option
- Emergency available

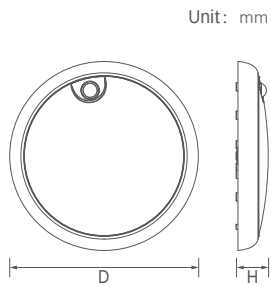

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)
SXL122C-PIR	12W/15W/18W	220-240V	2160LM	65	φ300x50MM

SXL122A

BULKHEAD


- With gear tray SXL122P
- High lumen efficiency, up to 120lm/W
- Suitable for branded driver, EM kit & sensor, such as Tridonic, Osram, Streamer, Merrytek
- 1 X BESA Entry + 4 X M20 Side Entry
- 3 colour replaceable trims
- CCT & power selectable by DIP switch
- IP65 IK10 for outdoor use
- Emergency, sensor, stand-by function available




EASY INSTALLATION

Push-fit Terminal For Quick Wiring

BESA ENTRY POINT
4 x SIDE ENTRY POINT

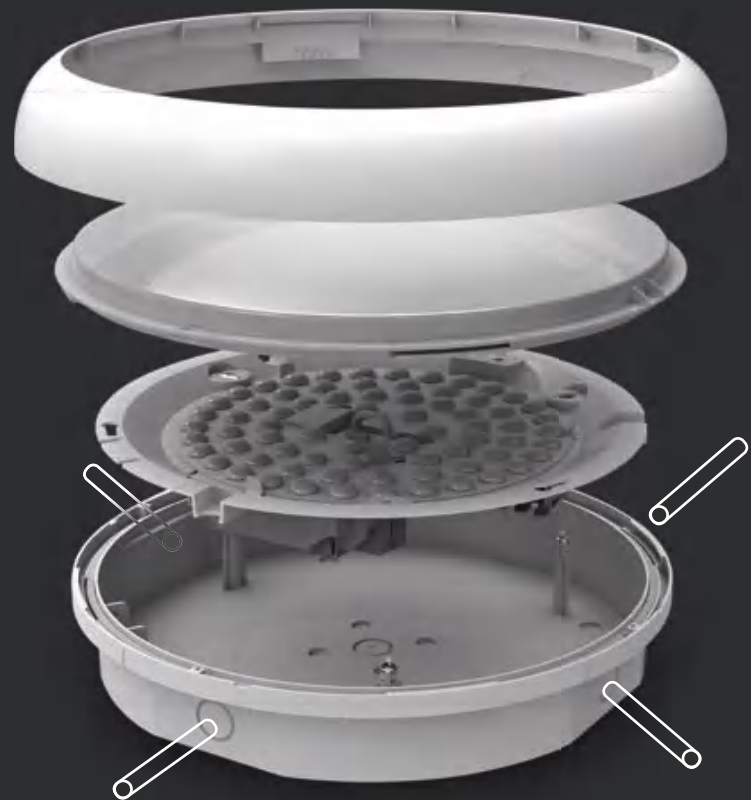

SUITABLE FOR BRANDED DRIVER, EM KIT, SENSOR

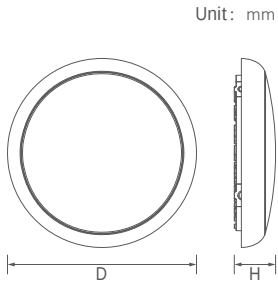


ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(ΦDxH)
SXL122A	20W	220-240V	2400LM	65	Φ320x75MM

SBH166

BULKHEAD

- Aluminum housing for E27
- Glass diffuser + BBQ grill bezel
- IP65, IK08
- CCT3 selectable

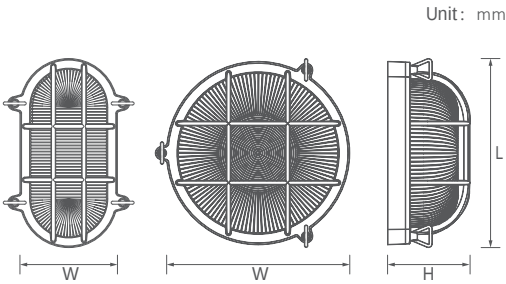


ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SBH166	40W	/	/	65	210x90x20MM
SBH166	40W	/	/	65	260x250x110MM

SXL209/ 209T

BULKHEAD

- IP65,IK10 for outdoor use
- PC base + PC opal cover
- CCT3 selectable
- Anti-theft screw included
- Eyelid trim for options

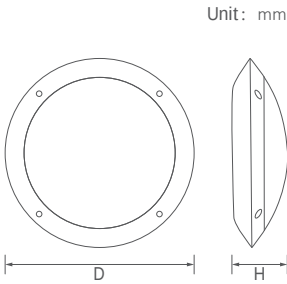


ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)
SXL209	18W	220-240V	1980LM	65	φ300x94MM
SXL209T	18W	220-240V	1980LM	65	325x235x97MM

SBH167

BULKHEAD

- IP65, IK10 for outdoor use
- Aluminum base + PC cover
- CCT3 Selectable + Power Selectable
- Isolated driver
- Microwave sensor & Emergency kit available
- Eyelid trim for options




ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)
SBH167	7W	220-240V	700LM	65	φ145x60MM
SBH167	15W	220-240V	1500LM	65	φ220x73MM
SBH167	20W	220-240V	2000LM	65	φ275x80MM
SBH167	30W	220-240V	3000LM	65	φ300x90MM
SBH167	40W	220-240V	4000LM	65	φ350x110MM
SBH167	60W	220-240V	6000LM	65	φ420x100MM

SBH135

BULKHEAD/WALLPACK

- Higher diffuser & Lower diffuser for options
- IP65 IK10 for outdoor use
- Power selectable
- CCT3 for options
- Photocell sensor & Stand-by sensor available
- Emergency kit available




ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SBH135	30W	220-240V	3000LM	65	270x300x120MM
SBH135	30W	220-240V	3000LM	65	270x300x180MM

SBH133

BULKHEAD

- IP65 IK10 or outdoor use
- PC base + PC diffuser + ABS bezel
- CCT3 for options
- Quick & Easy to install
- PIR sensor available
- Eyelid bezel for options




ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SBH133	8W	220-240V	800LM	65	120x209x60MM
SBH133	10W	220-240V	1000LM	65	120x209x60MM
SBH133	12W	220-240V	1200LM	65	120x209x60MM
SBH133	14W	220-240V	1400LM	65	120x209x60MM
SBH133	18W	220-240V	1800LM	65	120x209x60MM

SBH134

BULKHEAD

- IP65 IK10 for outdoor use
- PC base + PC cover + ABS ring
- CCT3 for options
- Quick & Easy to install
- PIR sensor available
- Eyelid bezel for options




ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)
SBH134	8W	220-240V	800LM	65	φ214x79MM
SBH134	10W	220-240V	1000LM	65	φ214x79MM
SBH134	12W	220-240V	1200LM	65	φ214x79MM
SBH134	14W	220-240V	1400LM	65	φ214x79MM
SBH134	18W	220-240V	1800LM	65	φ214x79MM

SBH168

BULKHEAD

- Water-resistant plastic construction
- IP65, IK08 for outdoor use
- ABS base + PP cover
- CCT3 for options
- PIR sensor available




ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SBH168	18W	220-240V	1800LM	65	251x115x66MM

SBH169

BULKHEAD

- Water-resistant plastic construction
- IK10 for outdoor use
- ABS + PC cover; ABS + PS cover
- CCT3 for options
- PIR sensor available
- Power selectable for option



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)
SBH169	18W	220-240V	1620LM	65	φ235x73MM



WALL LIGHT

PREMIUM QUALITY, UNIQUE DESIGN,
MULTI-SIDE LIGHT OUTPUT

SSL167

WALL LIGHT

- Rotatable structure for flexible light direction adjustment
- Robust Aluminum housing
- IP65 rated for versatile installation scenarios
- Optional finishes: black, grey & white



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SSL167	12W	220-240V	510LM	65	236x100x66MM
SSL167	18W	220-240V	750LM	65	336x100x66MM
SSL167	24W	220-240V	1000LM	65	436x100x66MM
SSL167	30W	220-240V	1260LM	65	536x100x66MM

SSL169

WALL LIGHT

- Multi-directional light emission
- Robust Aluminum housing
- Optional finishes: black, grey & white



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SSL169	18W	220-240V	900LM	54	260x125x125MM

SSL164

WALL LIGHT

- Multi-directional light emission
- Soft, even light output
- IP65 rated for versatile installation scenarios
- Robust Aluminum housing
- Optional finishes: black, grey & white



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SSL164	12W	100-265V	600LM	65	φ160x100MM

SSL168

WALL LIGHT

- Multi-directional light emission
- Up and down lighting
- Robust Aluminum housing
- Optional finishes: black, grey & white



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SSL168	10.5W	220-240V	600LM	54	220x110x90MM

SSL166

WALL LIGHT

- Multiple mounting angles
- Multi-directional light emission
- Up and down lighting
- Robust Aluminum housing



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SSL166	18W	220-240V	1980LM	54	350x100x82MM

SSL165

WALL LIGHT

- Multi-directional light emission
- Up and down lighting
- Robust Aluminum housing



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SSL165	10.5W	220-240V	600LM	54	220x110x90MM



CEILING LIGHT


CEILING LIGHT WITH MULTIFUNCTION
PERFECT FOR RESIDENTIAL OR COMMERCIAL APPLICATIONS

SXL169N | CEILING LIGHT

- Ultra slim design
- Free release and connection without cable
- CCT & power selectable by DIP switch
- Triac dimmable
- 3CCT & RGB & RGBCW by remote control



Free release and connection

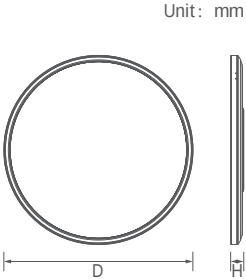

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)
SXL169N	18W	220-240V	1800LM	54	φ300x30MM
SXL169N	24W	220-240V	2400LM	54	φ420x30MM

SXL169R

CEILING
LIGHT

- Edgelite design creates soft indirect lighting effect
- Backlighting create atmosphere
- Ultra slim design
- Easy installation with rotatory plate
- CCT & power selectable by DIP switch
- 3CCT & RGB, RGBW by remote control
- Microwave sensor available
- Triac dimmable option
- Remote control option
- High lumen efficiency, up to 120lm/W




Push fit terminal



Screw fix terminal



Unit: mm



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)
SXL169R	12W	220-240V	1440LM	54	φ225x34MM
SXL169R	18W	220-240V	2160LM	54	φ300x34MM
SXL169R	24W	220-240V	2880LM	54	φ420x34MM
SXL169R	30W	220-240V	3600LM	54	φ500x34MM
SXL169S	12W	220-240V	1440LM	54	225x225x34MM
SXL169S	18W	220-240V	2160LM	54	292x292x34MM
SXL169S	24W	220-240V	2880LM	54	420x420x34MM
SXL169S	24W	220-240V	3600LM	54	295x595x34MM

SXL173R/ SXL173S

CEILING
LIGHT

- Edgelite design creates a soft indirect lighting effect
- Flat shape, ultra slim design
- White & black colour for option
- High lumen efficiency, up to 110lm/W
- Round & square shapes for option
- CCT selectable by DIP switch
- Dimmable & CCT selectable by remote control
- Surface & Pendant mounted for option




Remote control



Quick rotatory installation



Unit: mm

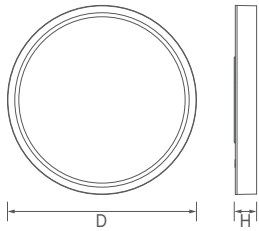

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)
SXL173R	18W	220-240V	1620LM	20	φ220x25MM
SXL173R	24W	220-240V	2160LM	20	φ300x25MM
SXL173R	36W	220-240V	3240LM	20	φ400x28MM
SXL173R	40W	220-240V	3600LM	20	φ500x28MM
SXL173R	50W	220-240V	4500LM	20	φ600x28MM
SXL173R	70W	220-240V	6300LM	20	φ750x28MM


SXL220

CEILING
LIGHT

- Recharge ceiling lamp
- Charging with USB-Type-C
- CCT & RGB & CCT + RGB for options
- Magnetic installation and screw fixed installation for options
- Round shape and square shape for options
- PIR sensor with Daytime sensing mode and night sensing mode
- Remote control



PIR set up, CCT, and RGG choose by switch and remote control

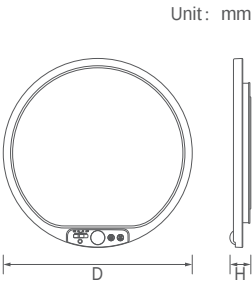

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)
SXL220	7W	5V	480LM	20	φ305x34MM


SXL156

CEILING
LIGHT

- Quick slide-in installation
- Terminal block for easy wiring
- PMMA LGP, even and soft lighting



Quick-release bracket with terminal block for easy wiring and installation

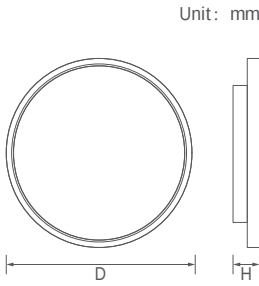

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)
SXL156	24W	220-240V	1700LM	54	φ320x45MM

DIFFERENT DESIGN DIFFUSER
FOR OPTION



Opal White



Amber Brown




Transparent Black



Transparent white

SXL217 | CEILING
LIGHT

- Clean design
- PMMA lens for uniform, glare-free light
- CCT selectable by DIP switch
- Rear central entry
- Different design diffuser for option

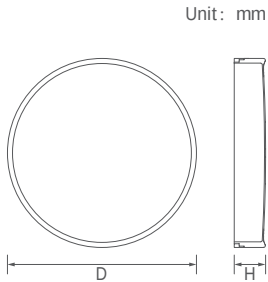

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)
SXL217	24W	220-240V	2160LM	20	φ280x68MM
SXL217	36W	220-240V	3240LM	20	φ380x69MM
SXL217	48W	220-240V	4320LM	20	φ480x69MM


SXL180

CEILING
LIGHT

- Clean lines for a modern touch
- Quick rotatory installation
- Golden & wooden colour rings for option
- CCT selectable by DIP switch



Quick rotatory installation

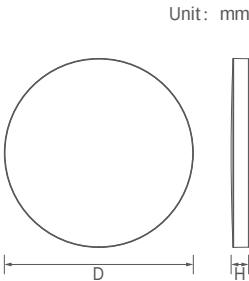

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)
SXL180	24W	220-240V	2400LM	44	φ300x42MM
SXL180	36W	220-240V	3600LM	44	φ400x42MM
SXL180	50W	220-240V	5000LM	44	φ500x42MM
SXL180	60W	220-240V	6000LM	44	φ600x47MM


SXL184R

CEILING
LIGHT

- Clean design
- Five rings options: White, Black, Chrome, Brushed Nickel, Gold
- Smart control available
- CCT selectable by DIP switch
- Rear central entry
- Dimmable & CCT selectable by remote control



Easy ring installation

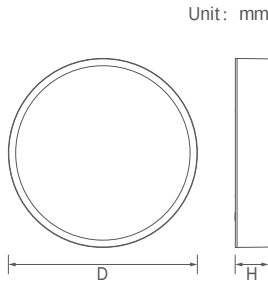

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)
SXL184R	12W	220-240V	960LM	20	φ260x60MM
SXL184R	18W	220-240V	1440LM	20	φ330x65MM
SXL184R	24W	220-240V	1920LM	20	φ380x60MM
SXL184R	48W	220-240V	3840LM	20	φ490x70MM


SXL129

CEILING
LIGHT

- Anti-yellowing PC diffuser
- Easy installation with push-out bracket
- CCT and power selectable by DIP switch
- Junction box for fast wiring
- Microwave sensor and Emergency available



Rear junction box and push-out bracket
for easy wiring and installation

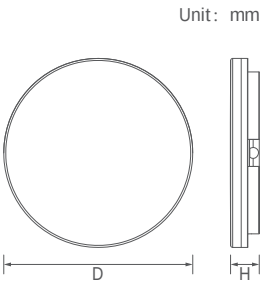

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)
SXL129R	15W	175-240V	1350LM	54	φ220x50MM
SXL129R	18W	175-240V	1620LM	54	φ280x50MM
SXL129R	24W	175-240V	2160LM	54	φ280x50MM
SXL129R	24W	175-240V	2700LM	54	φ330x50MM
SXL129S	15W	175-240V	1350LM	54	220x220x50MM
SXL129S	18W	175-240V	1620LM	54	280x280x50MM
SXL129S	24W	175-240V	2160LM	54	280x280x50MM
SXL129S	24W	175-240V	2700LM	54	330x330x50MM


SXL181

CEILING
LIGHT

- Clean design
- Quick slide-in installation
- White & black rings for option
- CCT selectable by DIP switch
- IP54 front



Quick slide-in installation

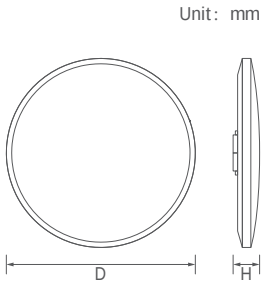

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)
SXL181	18W	185-265V	1800LM	54	φ250x50MM
SXL181	24W	185-265V	2400LM	54	φ320x45MM
SXL181	32W	185-265V	3200LM	54	φ380x55MM
SXL181	40W	185-265V	4000LM	54	φ480x70MM

SXL175B

CEILING
LIGHT


- Side glowing design
- Junction box for easy wiring
- White & black colour for option
- Easy installation with push-out bracket
- CCT & power selectable by DIP switch



Push-out bracket



Junction box available

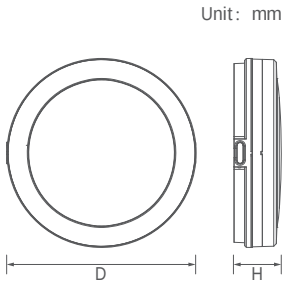

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)
SXL175B	20W	220-240V	1800LM	54	φ200x55MM
SXL175B	30W	220-240V	2700LM	54	φ300x55MM
SXL175B	40W	220-240V	3600LM	54	φ400x60MM


SXL219

CEILING
LIGHT

- Side lighting create soft atmosphere
- CCT3 + Power selectable by DIP switch
- Quick rotatory installation



Rear junction box and push-out bracket
for easy wiring and installation

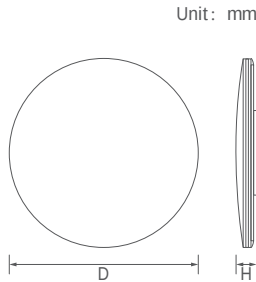

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)
SXL219	18W	220-240V	1260LM	54	φ295x49MM
SXL219	24W	220-240V	1920LM	54	φ370x54MM
SXL219	42W	220-240V	3200LM	54	φ450x66MM


SXL207

CEILING
LIGHT

- Ultra slim design
- Plug-and-play modular design all in one bulkhead
- Hinge structure PCB board
- 1 X BESA Entry + 4 M20 Side Entry
- CCT & Power selectable by DIP switch
- 1 second install plug-in microwave sensor
- 3 second install plug-in emergency pack



Hinge structure PCB board

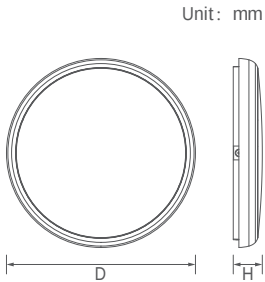

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)
SXL207	18/26/38W	220-240V	1800/2600/3800LM	54	φ500x68MM

SXL127


CEILING
LIGHT

- Large size
- High lumen efficiency, up to 130lm/W
- CCT & power selectable by DIP switch
- Emergency, sensor available



BESA hole

LED gear tray easy to replace

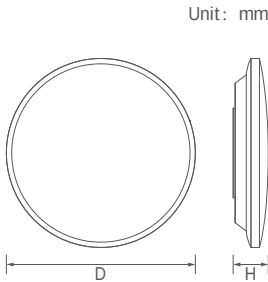

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)
SXL127	23W	220-240V	2850LM	20	φ431x108MM

SXL222

CEILING
LIGHT


- Iron housing + PC diffuser
- Hinge structure PCB board
- Plug-in emergency kit and sensor packs
- 1 second install plug-in microwave sensor
- 3 second install plug-in emergency pack



Hinge structure PCB board



Unit: mm

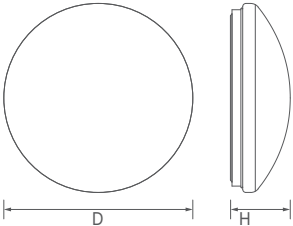

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(φDxH)
SXL222	8/10/11W	220-240V	1100LM	54	φ270x103MM
SXL222	10/11/14W	220-240V	1400LM	54	φ300x103MM
SXL222	9/12/18W	220-240V	1800LM	54	φ350x103MM
SXL222	11/14/22W	220-240V	2200LM	54	φ420x103MM



LINEAR LIGHT

ULTRA CLEAN LINEAR LIGHT FOR COMMERCIAL USE
QUICKCONNECTING, EASIER FOR ELECTRICIANS

SOF147E | LINEAR LIGHT

- Linkable and quick connecting
- Suspended and wall mounted installations
- Available in opal, micro-prism, reflector diffuser
- Available in black, grey and white finishes
- Downward / upward & downward light
- High lumen efficiency, up to 140lm/w



20S quick splicing



L, T & Cross Connector



Unit: mm




ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SOF147E	20W	200-240V	2400LM	20	600x50x75MM
SOF147E	30W	200-240V	3600LM	20	1200x50x75MM
SOF147E	38W	200-240V	4560LM	20	1490x50x75MM
SOF147E	45W	200-240V	5400LM	20	1790x50x75MM
SOF147E	60W	200-240V	7200LM	20	2390x50x75MM

SOF177

LINEAR
LIGHT


- 3CCT & Power selectable
- Fast linking with male/female connectors
- No dark area connection
- Suspended and Surface mounted installations
- Available in black and white finishes
- High lumen efficiency, up to 140lm/W

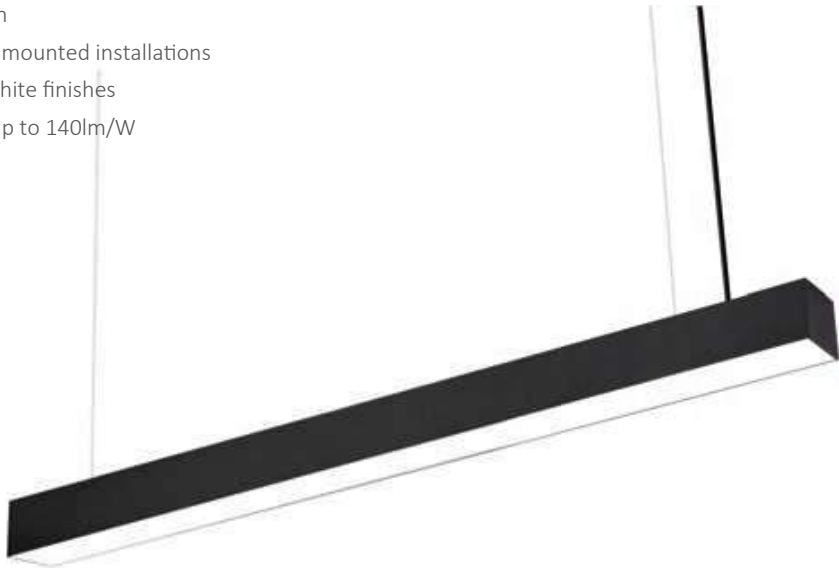

20S quick splicing



L, T & Cross Connector



Unit: mm

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SOF177	20W	220-240V	2600LM	20	600x50x70MM
SOF177	40W	220-240V	5200LM	20	1200x50x70MM
SOF177	50W	220-240V	6500LM	20	1500x50x70MM
SOF177-L	24W	220-240V	3120LM	20	425x425x70MM
SOF177-T	24W	220-240V	3120LM	20	425x425x70MM
SOF177-X	24W	220-240V	3120LM	20	425x425x70MM

SOF185

LINEAR
LIGHT



- Opal, reflector, prismatic diffuser
- Suspended and wall mounted installations
- CCT and powerselectable by DIP switch



Reflector diffuser



Prismatic diffuser



Unit: mm

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SOF185	24/32/40W	220-240V	2400/3200/4000LM	20	1200x50x60MM
SOF185	24/32/40W	220-240V	2400/3200/4000LM	20	1500x50x60MM

LED LINEAR TRUNKING SYSTEMS

No Pre-build Wires / Fast Splicing / Interconnections Lighting Luminaire



BEAM ANGLES
60°/90°/P20°/RL25°

HIGH LIGHT EFFICIENCY
200LM/W Lower UGR

SYSTEM MATCHING
Floodlight/Spotlight/Projector/Display/Emergency Light

SOF186 | TRUNKING LIGHT


- Track can match with different lights, floodlight, spotlight, projector, display
- 4-wire 3 circuit system,switch different circuits by flipping live wire
- Long size optic lens, 60°/90°/P20°/RL25°angle for option
- High lumen efficiency, up to 200lm/W
- No Pre-build wires
- Fast linking with male/female connectors



Fast splicing



No dark zone connection

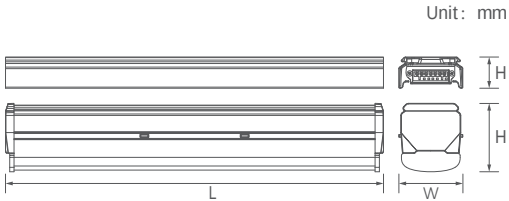


ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SOF186	30W	220-240V	4800LM	20	750x67x32.5MM
SOF186	80W	220-240V	12800LM	20	1500x67x32.5MM

SOF187

LINEAR
LIGHT

- Customized different length from 0.6m-3.0m
- 30°/60°/90°/120° angle for option
- CCT and power selectable by DIP switch
- High lumen efficiency, up to 140lm/W
- Fast linking with male/female connectors
- No dark area connection
- Suspended and wall mounted installations
- Available in black and white finishes

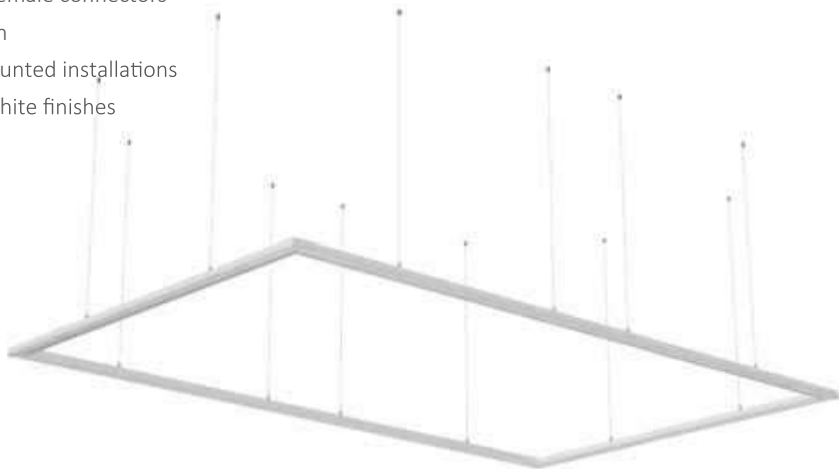

Fast and easy linking in line



No dark area connection



Unit: mm

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SOF187	40W	220-240V	5600LM	20	1270x350x130MM
SOF187	60W	220-240V	8400LM	20	1570x350x130MM
SOF187-L	18W	220-240V	2520LM	20	360X300x60x35MM
SOF187-T	25W	220-240V	3500LM	20	560x280x60x35MM
SOF187-X	32W	220-240V	4480LM	20	560x500x60x35MM
SOF187-J	N/A	N/A	N/A	20	240x60x35MM

SOF188

LINEAR
LIGHT

- 3CCT & Power selectable
- Fast linking with male/female connectors
- No dark area connection
- Suspended and Surface mounted installations
- Available in black and white finishes
- High lumen efficiency, up to 160lm/W



Fast and easy linking in line



Available in black and white finishes



Unit: mm

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SOF188	40W	220-240V	6400LM	20	1270x350x130MM
SOF188	60W	220-240V	9600LM	20	1570x350x130MM




BATTEN

PROFESSIONAL LED BATTEN FOR COMMERCIAL USE
WITH MULTI-FUNCTIONS. EASIER FOR ELECTRICIANS


SOF180

BATTEN

- Quick release design with integrated diffuser and gear tray
- Hinge structure for flexible installation
- Plug-and-play modular all in one batten
- Conduit entry points at both ends
- Rear BESA conduit
- Plug-in Emergency pack and Microwave sensor without any screw
- High lumen efficiency, up to 150lm/w
- Excellent lighting performance
- CCT & power selectable by DIP switch
- Microwave sensor with switchable ON/OFF and corridor function
- Emergency pack with switchable Self-test and Manual-test function

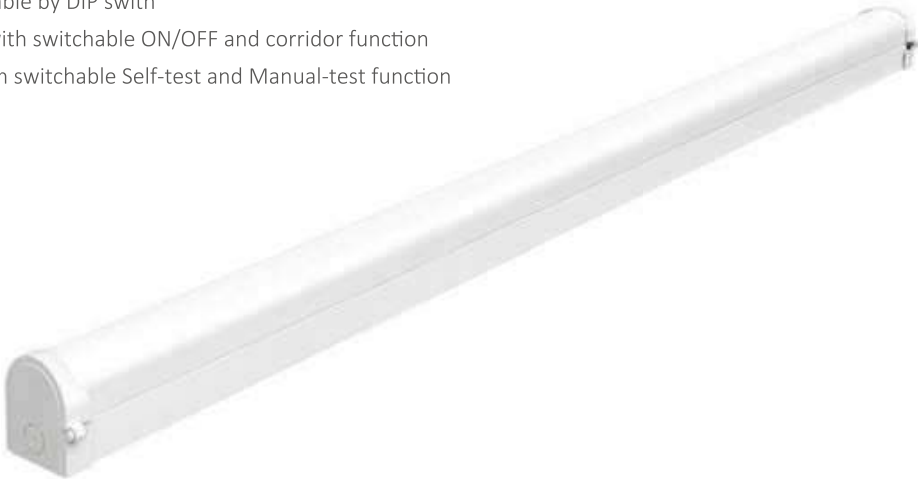

Unit: mm



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SOF180	20W	220-240V	2800LM	20	570x60x62MM
SOF180	40W	220-240V	5600LM	20	1170x60x62MM
SOF180	50W	220-240V	7000LM	20	1470x60x62MM
SOF180	60W	220-240V	8400LM	20	1770x60x62MM

HINGE DESIGN

LOCK-IN-PLACE STRUCTURE
FOR FLEXIBLE INSTALLATION



BE MORE SAFE
AS YOU MUST
USE A TOOL TO OPEN IT

PLUG-AND-PLAY MODULAR

PLUG-IN EMERGENCY AND MICROWAVE SENSOR
WITHOUT ANY SCREW

► SOF180




MODULAR



Plug-and-play modular

EM PACK


Self-test and Manual-test
function switchable

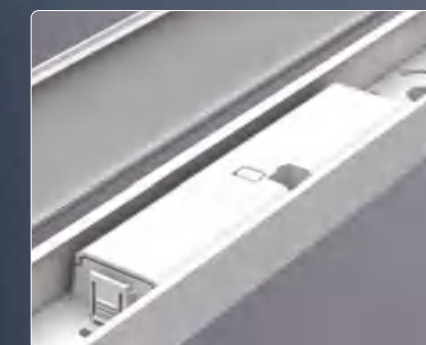

EM Pack

MW SENSOR

Stand-by / Corridor function
Switchable to ON/OFF feature
Setting by DIP or remote control

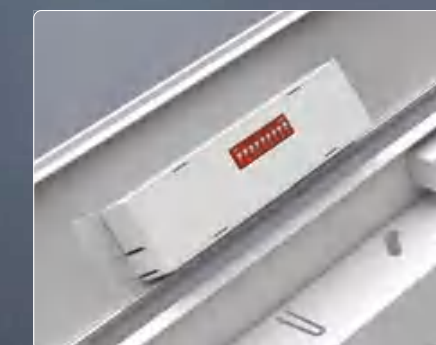


MW Sensor

SOF167

BATTEN


- UGR<19
- Smooth even light distribution
- Microwave sensor available
- Equipped with Tridonic branded driver with reliable quality
- Flat prismatic diffuser to promise anti-glare performance
- Rear BESA conduit
- Suitable for classroom, hospital and office

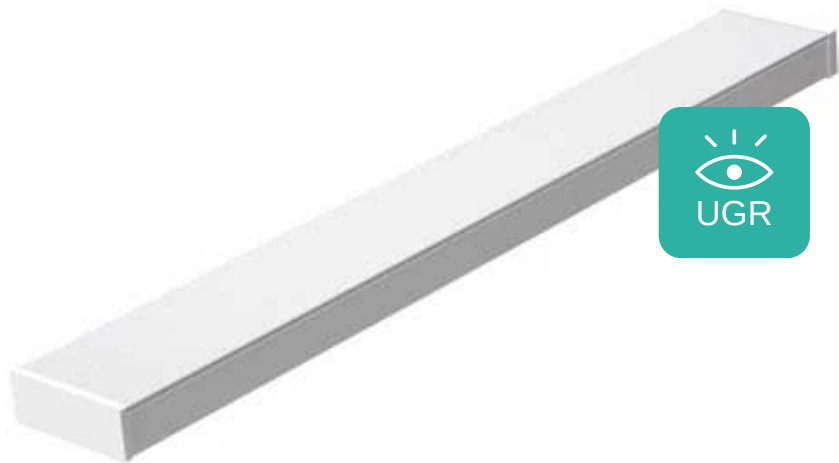

Flexible quick connecting



Prism diffuser

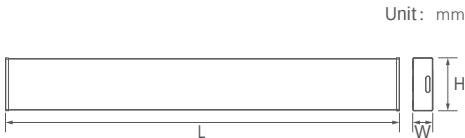

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SOF167	35W	220-240V	4350LM	40	1220x160x55MM
SOF167	45W	220-240V	5620LM	40	1520x160x55MM

SOF117

BATTEN

- 170mm width
- Conduit entry points at both ends
- Suitable for BESA mounting
- Smooth even light distribution
- Multiple variations available includes Emergency pack and Microwave sensor
- High lumen efficiency, up to 150lm/w



Easy open and close



BESA mounting



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SOF117	40W	220-240V	5600LM	20	1170x170x79MM
SOF117	60W	220-240V	8400LM	20	1500x170x79MM
SOF117	75W	220-240V	10500LM	20	1800x170x79MM

SOF117U

BATTEN


- Low UGR, anti-glare
- Conduit entry points at both ends
- Suitable for BESA mounting
- Smooth even light distribution
- Multiple variations available: MW sensor & Emergency pack
- High lumen efficiency, up to 150lm/w



Easy open and close,
saving labor cost



Space for customized LOGO

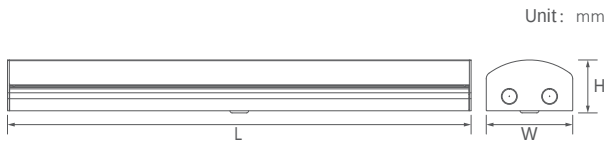

Unit: mm



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SOF117U	40W	220-240V	5600LM	20	1170x170x79MM
SOF117U	60W	220-240V	8400LM	20	1500x170x79MM
SOF117U	75W	220-240V	10500LM	20	1800x170x79MM

SOF171

BATTEN

- Quick release design with integrated diffuser and gear tray
- Double security structure without screw
- Conduit entry points at both ends
- Suitable for BESA mounting
- Multiple variations available: MW Sensor & Emergency pack
- High lumen efficiency, up to 150lm/w
- Excellent lighting performance
- CCT & power selectable by DIP switch




Quick release structure



Integrated diffuser and gear tray



Double security structure
without screw

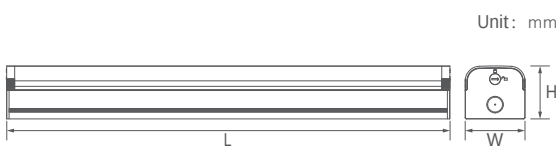

Unit: mm



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SOF171	20W	220-240V	2800LM	20	600x72x64MM
SOF171	40W	220-240V	5600LM	20	1200x72x64MM
SOF171	60W	220-240V	8400LM	20	1500x72x64MM
SOF171	75W	220-240V	10500LM	20	1800x72x64MM

SOF129C

BATTEN


- Quick release design with integrated diffuser and gear tray
- Double security structure without screw
- Conduit entry points at both ends
- Suitable for BESA mounting
- Multiple variations available: MW Sensor & Emergency pack
- High lumen efficiency, up to 150lm/w
- Excellent lighting performance
- CCT & power selectable by DIP switch
- 76mm width perfect for decorative



Rotatable end caps



Integrated diffuser and gear tray

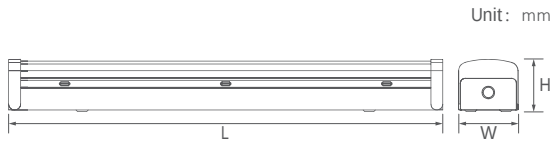

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SOF129C	20W	220-240V	2800LM	20	600x76x66MM
SOF129C	40W	220-240V	5600LM	20	1200x76x66MM
SOF129C	60W	220-240V	8400LM	20	1500x76x66MM
SOF129C	75W	220-240V	10500LM	20	1800x76x66MM

SOF129A

BATTEN


- Quick release design with integrated diffuser and gear tray
- Double security structure without screw
- Conduit entry points at both ends
- Suitable for BESA mounting
- Multiple variations available: MW Sensor & Emergency pack
- High lumen efficiency, up to 150lm/w
- Excellent lighting performance
- CCT & power selectable by DIP switch
- 84mm width perfect for decorative



Rotatable end caps



Integrated diffuser and gear tray

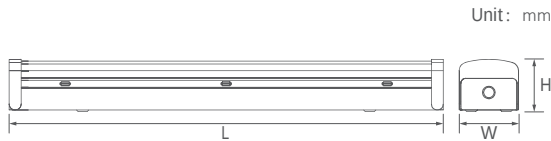

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SOF129A	20W	220-240V	2800LM	20	620x84x77MM
SOF129A	40W	220-240V	5600LM	20	1200x84x77MM
SOF129A	60W	220-240V	8400LM	20	1500x84x77MM
SOF129A	75W	220-240V	10500LM	20	1800x84x77MM

SOF148A

BATTEN

- Aluminium body, polycarbonate diffuser
- Suitable for rear wiring
- Smooth even light distribution
- CCT & power selectable by DIP switch on end cap
- Large terminal block



Quick release design



3CCT + 2power



Unit: mm

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SOF148A	20W	220-240V	2400LM	20	600x85x38MM
SOF148A	40W	220-240V	4800LM	20	1200x85x38MM
SOF148A	50W	220-240V	6000LM	20	1500x85x38MM

SOF169

BATTEN

- 3CCT & power changeable by DIP switch
- Economic model



3CCT & power changeable



Unit: mm

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SOF169	20W	220-240V	2400LM	20	600x74x23MM
SOF169	40W	220-240V	4800LM	20	1200x74x23MM
SOF169	50W	220-240V	6000LM	20	1500x74x23MM
SOF169	60W	220-240V	7200LM	20	1800x74x23MM

SOF104

BATTEN


- Long installation distance for flexible operation
- With terminal block for fast wiring
- ECO LED T8 cabinet light



Power ON/OFF



Terminal block for easy wiring

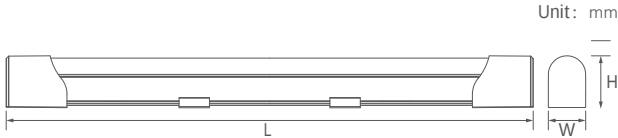

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SOF104	10W	220-240V	1000LM	20	600x30x42MM
SOF104	20W	220-240V	2000LM	20	1200x30x42MM
SOF104	24W	220-240V	2400LM	20	1500x28x44MM

SOF173

BATTEN


- 3CCT & power on/off by switch
- With 15cm linkable cable and 120cm EU plug
- Round & Square shape for option
- ECO LED T5 cabinet light



3CCT & Power on/off



Round & Square shape for option

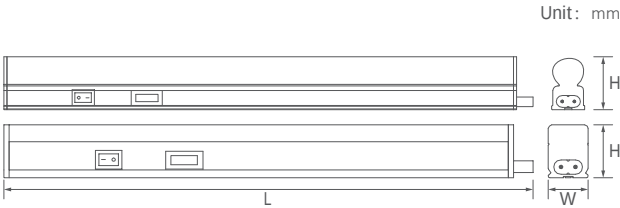

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
SOF173	5W	220-240V	500LM	20	310x22x30MM
SOF173	10W	220-240V	1000LM	20	610x22x30MM
SOF173	15W	220-240V	1500LM	20	870x22x30MM
SOF173	20W	220-240V	2000LM	20	1160x22x30MM
SOF173	24W	220-240V	2400LM	20	1460x22x30MM




TRI-PROOF

PROFESSIONAL TRI-PROOF
DESIGNED TO MAKE IT EASIER FOR ELECTRICIANS




► STF188

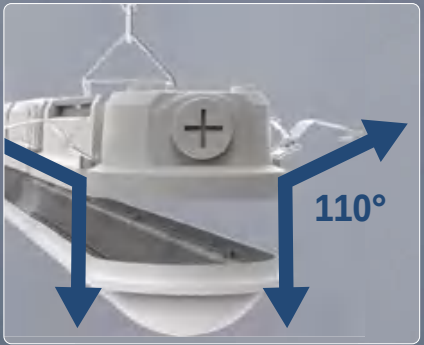


Two-part design,
Lock-in-place side clips design




Plug-and-play modular all in one fixture

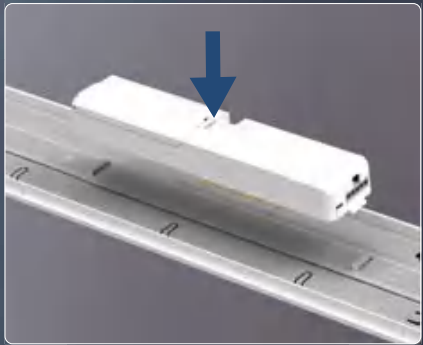


Plug-in Emergency and microwave sensor
without any screw

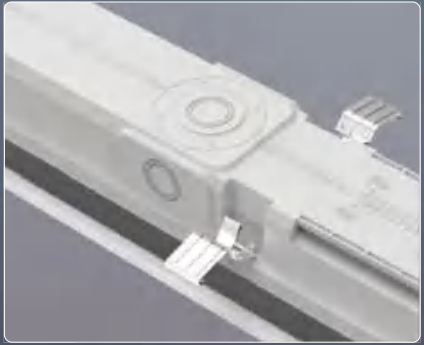

BESA conduit & side holes for cable entry,
suitable for various applications

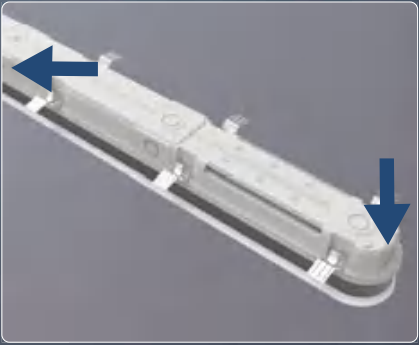

3 pre-drilled holes For cable entry

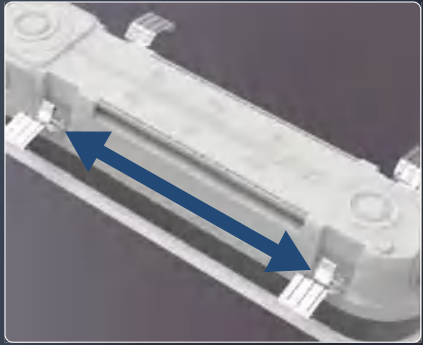

18cm long distance for brackets



EM Pack

Self-test and Manual-test function switchable


MW Sensor

Stand-by / Corridor function
Switchable to ON/OFF feature
Setting by DIP or remote control

PLUG-AND-PLAY MODULAR
Easy installation


STF188 TRI-PROOF

- 2-part design with Integrated diffuser and gear tray design
- Long distance 18cm adjustable to fix bracket
- 3 x BESA conduit and side conduit for cable entry
- Lock-in-place side clip design for easy installation
- Plug-and-play modular all in one fixture
- Plug-in Emergency pack and Microwave sensor without any screw
- Microwave sensor with switchable ON/OFF and corridor function Emergency
- Pack with switchable Self-test and Manual-test function

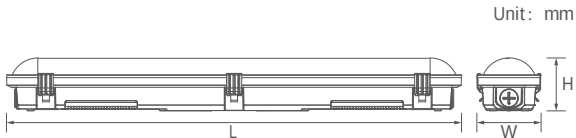

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
STF188	20W	220-240V	2800LM	65	669x94x78MM
STF188	40W	220-240V	5600LM	65	1269x94x78MM
STF188	60W	220-240V	8400LM	65	1569x94x78MM
STF188	75W	220-240V	10500LM	65	1869x94x78MM

▼ STF171

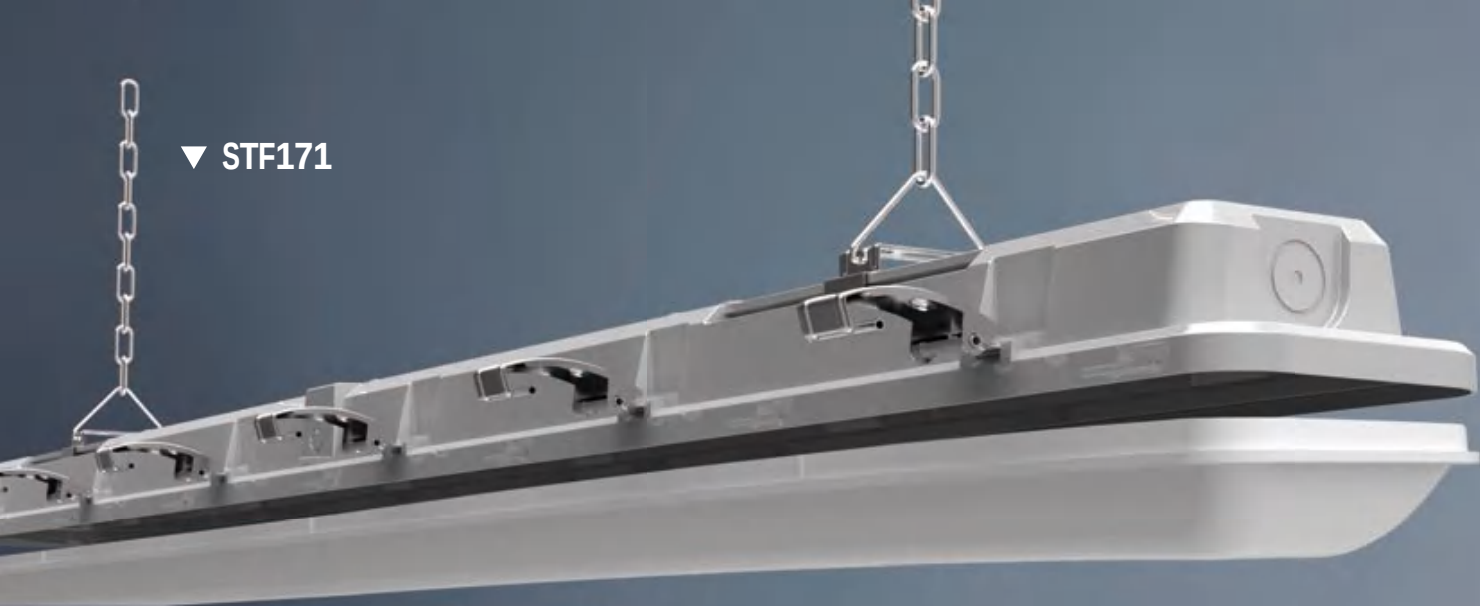

Lock-in-place side clip design



Integrated battery and control gear, less wiring work and saving labor cost.

PROFESSIONAL
TRI-PROOF


Designed to
make it easier
for electricians



Push type sensor installation,
no need screws




BESA holes & side holes for cable entry,
suitable for various applications

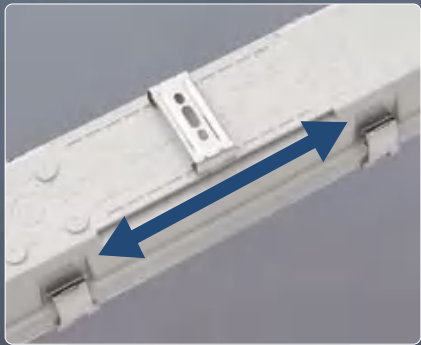

Long distance 18cm to fix bracket, and
it's adjustable

STF171 | TRI-PROOF

- Integrated diffuser and gear tray design
- 18cm long distance for brackets
- BESA holes & side holes for cable entry, suitable for various applications
- Lock-in-place side clip design for easy installation
- Multiple variations available includes Emergency pack and Microwave sensor



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
STF171	20W	220-240V	2800LM	65	600x100x75MM
STF171	40W	220-240V	5600LM	65	1200x100x75MM
STF171	60W	220-240V	8400LM	65	1500x100x75MM
STF171	70W	220-240V	9800LM	65	1800x100x75MM

STF202

TRI
-PROOF

- Easy open and wiring by rotating end cap
- Microwave and PIR sensor module
- CCT & power selectable by DIP switch
- Gear tray replaceable
- Remote control option



Headphone type twist-in structure



CCT & power selectable by DIP switch



Unit: mm



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
STF202	22/30W	220-240V	4800LM	65	1200x53x47MM
STF202	30/40W	220-240V	6400LM	65	1500x53x47MM


STF211

TRI
-PROOF


- PC extrusion
- Toolless opening end caps, easy operation.
- CCT selectable by DIP switch
- High lumen efficiency up to 150lm/w
- Linkable for option



Toolless

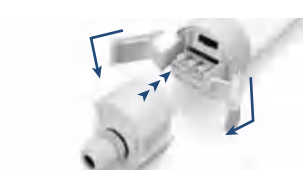

3CCT Slide Switch

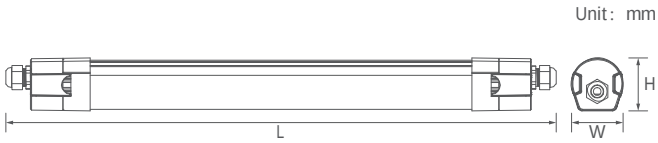

Unit: mm



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
STF211	20W	220-240V	2800LM	65	600x59x60MM
STF211	40W	220-240V	5600LM	65	1200x59x60MM
STF211	50W	220-240V	7000LM	65	1500x59x60MM

STF176

TRI-PROOF


- PC extrusion
- Rotatable end caps, easier for electricians
- LED module can be withdrawn to replace
- CCT & power selectable by DIP switch
- High lumen efficiency 150lm/W
- Linkable for option



LED module replaceable



Rotatable end caps

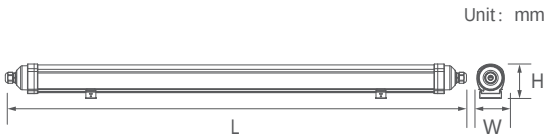

Unit: mm



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
STF176	18W	220-240V	2520LM	65	617x72x67MM
STF176	36W	220-240V	5040LM	65	1117x72x67MM
STF176	45W	220-240V	6300LM	65	1467x72x67MM

STF123

TRI-PROOF


- PC extrusion
- ECO model
- CCT selectable by DIP switch
- Whole distance for brackets



CCT selectable by DIP switch



Whole distance for brackets

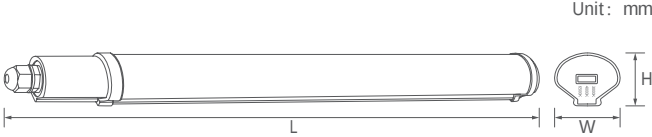

Unit: mm



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
STF123	18W	220-240V	1980LM	65	625x50x40MM
STF123	36W	220-240V	3960LM	65	1225x50x40MM
STF123	45W	220-240V	4950LM	65	1525x50x40MM


STF126

TRI
-PROOF

- 125mm width for professional project use
- Ultra efficient, up to 140lm/W
- Robust Polycarbonate housing and diffuser
- IP65 and IK10 rated for outdoor application
- Stainless steel clip
- CCT and Power selectable by DIP switch
- Multiple variations available includes Emergency pack and Microwave sensor



125mm width for professional project use

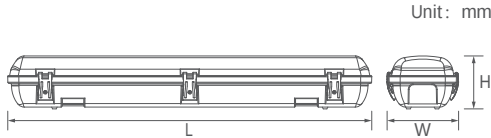

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
STF126	20W	220-240V	2800LM	65	655x125x91.5MM
STF126	40W	220-240V	5600LM	65	1255x125x91.5MM

STF182

TRI
-PROOF


- Integrated diffuser and gear tray design
- 15cm long distance for brackets
- Ultra efficient, up to 180lm/W
- Robust Polycarbonate housing and diffuser
- CCT and Power selectable by DIP switch
- Multiple variations available includes Emergency pack and Microwave sensor



15cm long distance for brackets



Integrated diffuser and gear tray design

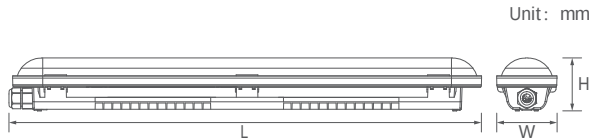

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
STF182A	20W	220-240V	3000LM	65	599x80x68MM
STF182A	40W	220-240V	6000LM	65	1208x80x68MM
STF182A	60W	220-240V	9000LM	65	1508x80x68MM
STF182B	20W	220-240V	2800LM	65	600x97x77MM
STF182B	40W	220-240V	5600LM	65	1200x97x77MM
STF182B	60W	220-240V	8400LM	65	1500x97x77MM
STF182B	70W	220-240V	9800LM	65	1800x97x77MM

STF191

TRI
-PROOF


- Integrated diffuser and gear tray design
- Ultra efficient, up to 180lm/W
- All electrical components fixed on backside of LED plate
- More cable entries on back side
- 20cm long distance for brackets



20cm long distance for brackets



Integrated diffuser and gear tray design

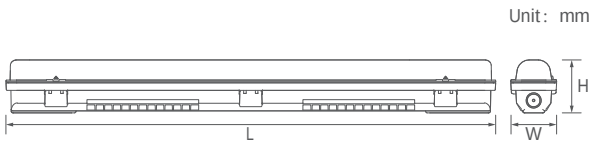

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
STF191	20W	220-240V	2400LM	65	685x65x70MM
STF191	40W	220-240V	4800LM	65	1295x65x70MM
STF191	60W	220-240V	7200LM	65	1595x65x70MM

STF177A

TRI
-PROOF



- Fast wiring with push type connector
- High lumen efficiency up to 150lm/W
- Linkable for option
- Sensor type for option
- 15cm long distance for brackets



Push type connector for fast wiring



15cm long distance for fix brackets

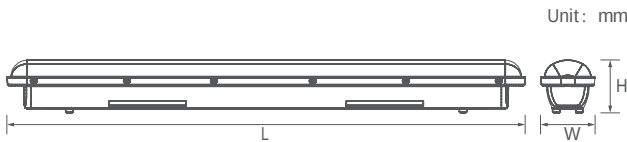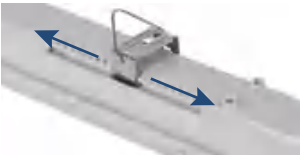

ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
STF177A	20W	220-240V	3000LM	65	600x70x64MM
STF177A	40W	220-240V	6000LM	65	1200x70x64MM
STF177A	50W	220-240V	7500LM	65	1500x70x64MM

STF177C

TRI-PROOF


- Fast and easy wiring with junction box
- CCT selectable for option
- Linkable for option
- 15cm long distance for brackets



Junction box



15cm long distance for fix brackets

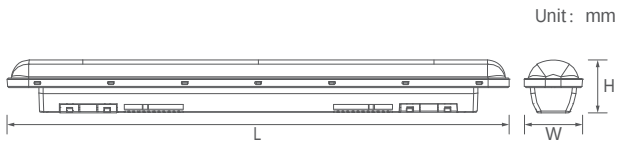

Unit: mm



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
STF177C	20W	220-240V	2000LM	65	600x70x64MM
STF177C	40W	220-240V	4000LM	65	1200x70x64MM
STF177C	50W	220-240V	5000LM	65	1500x70x64MM

STF159

TRI-PROOF


- PC extrusion
- Non-isolated driver
- Whole distance for brackets
- Rotatable end caps, easier for electricians



Rotatable end caps,
easier for electricians



Whole distance for brackets

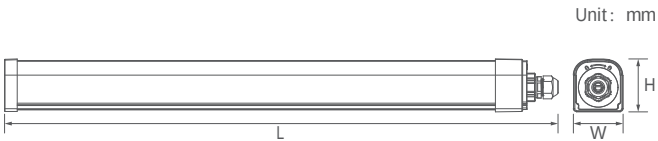

Unit: mm



ITEM	POWER	VOLTAGE	LUMEN	IP	SIZE(LxWxH)
STF159	20W	220-240V	2400LM	65	600x59x62.5MM
STF159	40W	220-240V	4800LM	65	1200x59x62.5MM
STF159	60W	220-240V	7200LM	65	1500x59x62.5MM
STF159	80W	220-240V	9600LM	65	1800x59x62.5MM